
Product data sheet



GF Uponor S-Press tee reduced PPSU 50-25-50

1039968

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

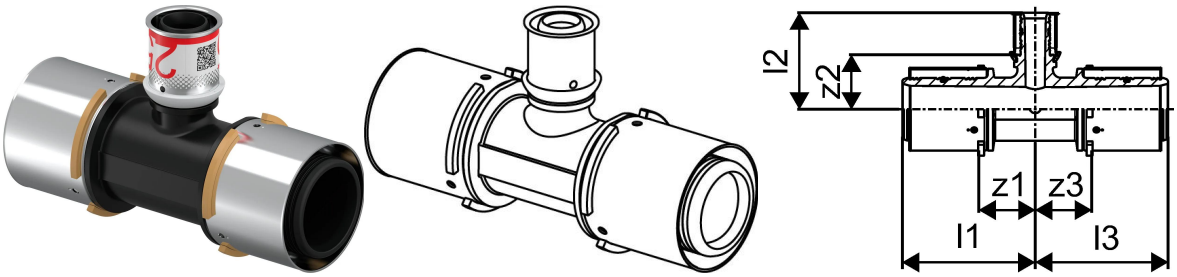

About GF Uponor S-Press tee reduced PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee reduced PPSU 50-25-50

1039968

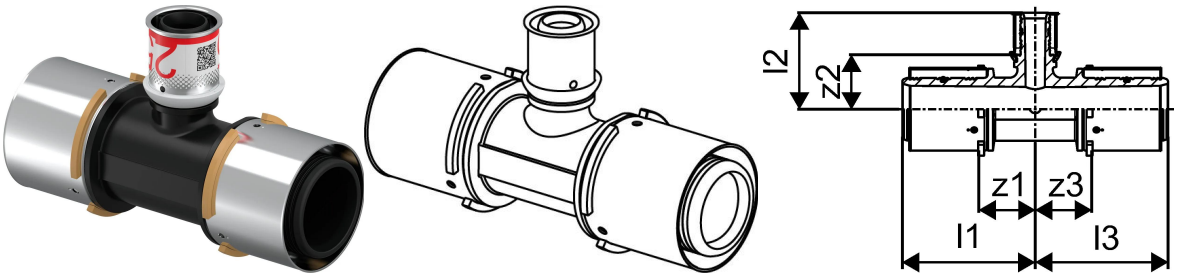

Product code

Item no EAN	6414905229062
Item no GF	35001039968
Item no GTIN	06414905229062
Item no LVI	1720725
Item no NRF	5114424
Item no RSK	1808004
Item no VVS	087442148

Dimensions

Item Unit Height	88.7
Item Unit Length	145.2
Item Unit Weight	0,217
Item Unit Width	55.4
Item_UOM	pce

Measurements

Length (l1)	72,6
Length (l2)	61
Length (l3)	72,6
z1	33,7
Z2	32,7
Z3	33,7

Packaging

Packaging GTIN PL1	06414905480296
Packaging GTIN PL4	06414905480302
Packaging Height PL1	185
Packaging Height PL4	699

Packaging Length PL1	185
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	432
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0031487
Packaging Volume PL4	0,67104
Packaging Weight PL1	0,722
Packaging Weight PL4	127,919
Packaging Width PL1	92
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+