
Product data sheet




GF Uponor S-Press reducer PPSU 50-40

1046406

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

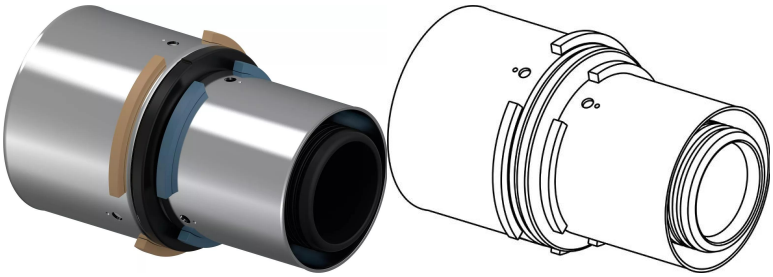



About GF Uponor S-Press reducer PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press reducer PPSU 50-40

1046406

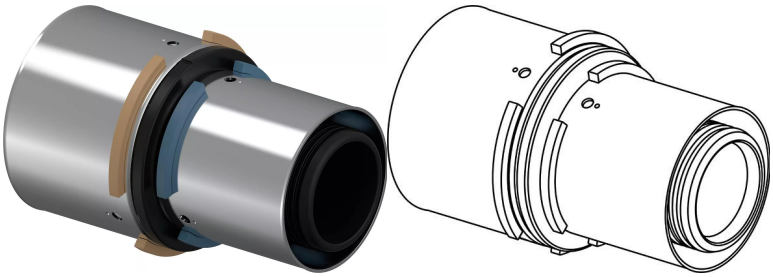



Product code

Item no EAN	4021598112803
Item no GF	35001046406
Item no GTIN	04021598112803
Item no LVI	1722725
Item no NOBB	48519546
Item no NRF	5072022
Item no RSK	1877980
Item no VVS	087454150

Dimensions

Item Unit Height	57
Item Unit Length	87
Item Unit Weight	0,13
Item Unit Width	57
Item_UOM	pce

Measurements

LENGTH_L	91
Length (l1)	38,8
Length (l2)	39
z1	13,2

Packaging

Packaging GTIN PL1	06414905287642
Packaging GTIN PL4	06414905287659
Packaging Height PL1	90
Packaging Height PL4	570
Packaging Length PL1	175

Packaging Length PL4	1120
Packaging Quantity PL1	3
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00212625
Packaging Volume PL4	0,4775232
Packaging Weight PL1	0,48
Packaging Weight PL4	117,16
Packaging Width PL1	135
Packaging Width PL4	748

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+