
Product data sheet



GF Uponor RS spacer RS2-RS2 l=5mm

1046750

- Made of tin plated brass
- Spacer to connect RS base parts of equal dimensions.

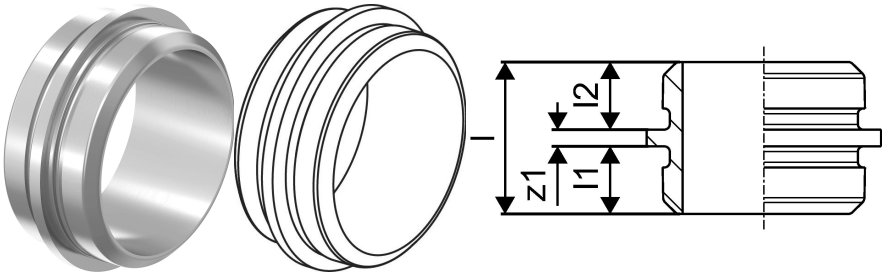

About GF Uponor RS spacer

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS spacer RS2-RS2 l=5mm

1046750

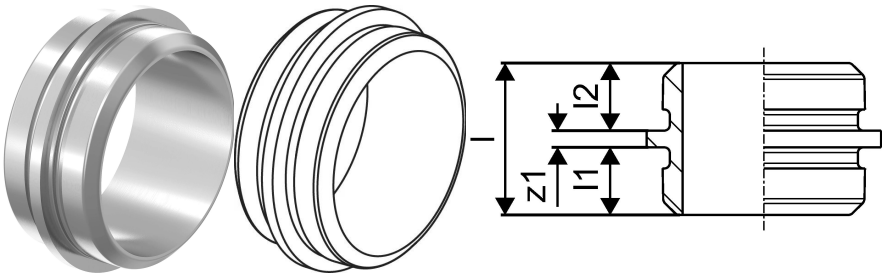

Product code

Item no EAN	4021598113077
Item no GF	35001046750
Item no GTIN	04021598113077
Item no LVI	1720636
Item no NRF	5079085
Item no RSK	1877798
Item no VVS	045458205

Dimensions

Item Unit Height	46
Item Unit Length	65
Item Unit Weight	0,355
Item Unit Width	65
Item_UOM	pce

Measurements

LENGTH_L	45
Length (l1)	20
Length (l2)	20
z1	5

Packaging

Packaging GTIN PL1	06414905483020
Packaging GTIN PL4	06414905483037
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	120
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000984
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,421
Packaging Weight PL4	201,99
Packaging Width PL1	100
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+