


Uponor S-Press tee reducer 40-25-32

1046917

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

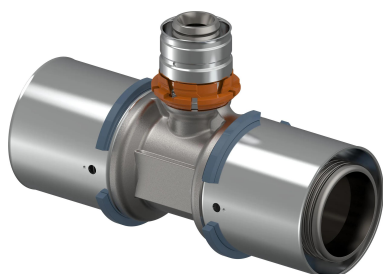

About Uponor S-Press tee reducer

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press tee reducer 40-25-32

1046917



Status

Item Available Till date 2026-12-31T00:00:00.000+0100

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Product code

Item no EAN 4021598114142

Item no GF 35001046917

Item no GTIN 04021598114142

Item no VVS 045476416

Dimensions

Item Unit Height 48

Item Unit Length 112

Item Unit Weight 0,44

Item Unit Width 84

Item_UOM pce

Measurements

Length (l1) 61

Length (l2) 60

Length (l3) 53

z1 23,1

Z2 29,7

Z3 22,7

Packaging

Packaging GTIN PL1 06414905460601

Packaging GTIN PL4 0641490555321

Packaging Height PL1 105

Packaging Height PL4 645

Packaging Length PL1 176

Packaging Length PL4 800

Packaging Quantity PL1	5
Packaging Quantity PL4	500
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,265
Packaging Weight PL4	246,5
Packaging Width PL1	202
Packaging Width PL4	1200

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb