


Uponor S-Press tee 40-40-40

1046921

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code

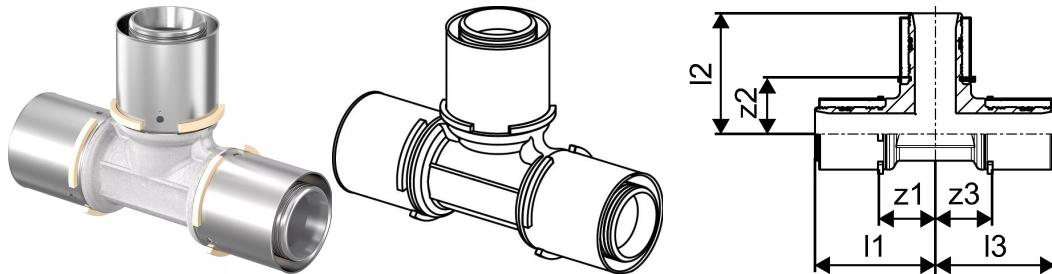

About Uponor S-Press tee

Specification

- with fixed press sleeve
- stop ring
- test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:



- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC
- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC
- KIWA – UK water Regulation 4
- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press tee 40-40-40

1046921

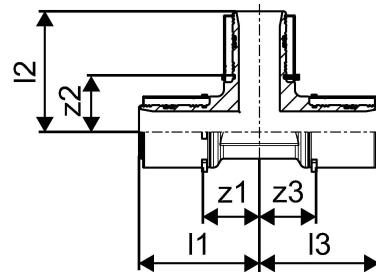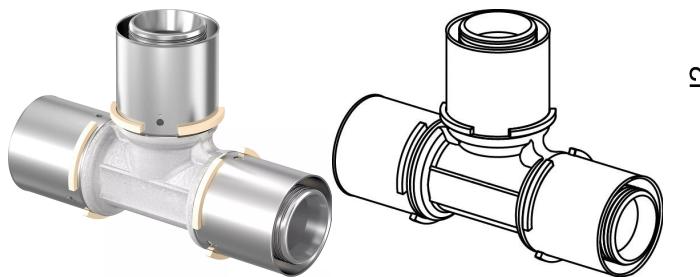

Product code

Item no EAN	4021598114180
Item no GF	35001046921
Item no GTIN	04021598114180
Item no VVS	045476040

Dimensions

Item Unit Height	48
Item Unit Length	140
Item Unit Weight	0,684
Item Unit Width	103
Item_UOM	pce

Measurements

Length (L1)	71,5
Length (L2)	71,5
Length (L3)	71,5
z1	33,6
Z2	33,6
Z3	33,6

Packaging

Packaging GTIN PL1	06414905401611
Packaging GTIN PL4	06414905401628
Packaging Height PL1	105
Packaging Height PL4	800
Packaging Length PL1	200
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00378
Packaging Volume PL4	0,768
Packaging Weight PL1	3,499
Packaging Weight PL4	301,336
Packaging Width PL1	180
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb