Product data sheet





GF Uponor S-Press tee female thread FT 40-Rp3/4"-40

1046923

- Made of tin-plated brass
- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code
- Female thread to BS EN 10226-1



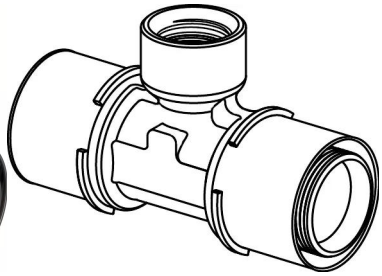



About GF Uponor S-Press tee female thread FT

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee female thread FT 40-Rp3/4"-40

1046923

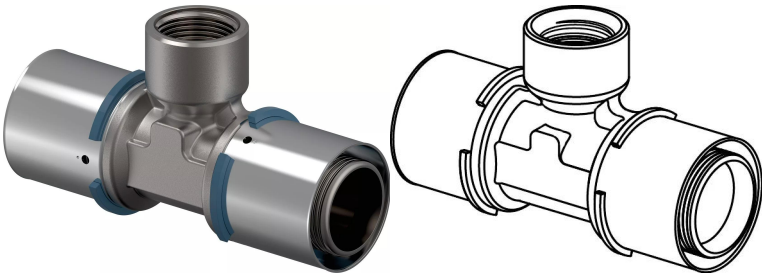



Measurements

Female thread Rp	0,75
Length (l1)	64
Length (l2)	47
Length (l3)	64
z1	26,1
Z2	30,7
Z3	26,1

Product code

Item no EAN	4021598114203
Item no GF	35001046923
Item no GTIN	04021598114203
Item no LVI	1720954
Item no NRF	1627551
Item no VVS	045478414

Dimensions

Item Unit Height	60
Item Unit Length	125
Item Unit Weight	0,53
Item Unit Width	40
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905401635
Packaging GTIN PL4	06414905401642
Packaging Height PL1	110
Packaging Height PL4	794

Packaging Length PL1	205
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	400
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00394625
Packaging Volume PL4	0,76224
Packaging Weight PL1	2,75
Packaging Weight PL4	239,12
Packaging Width PL1	175
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+