


## Uponor S-Press tee reducer 50-40-50

1046927

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

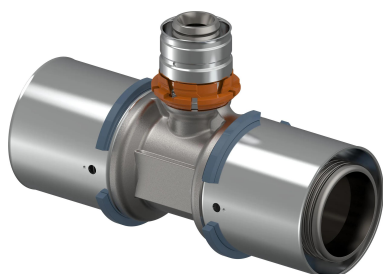

### About Uponor S-Press tee reducer

#### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press tee reducer 50-40-50

1046927



### Product code

Item no EAN	4021598114241
Item no GF	35001046927
Item no GTIN	04021598114241
Item no VVS	045476445

### Dimensions

Item Unit Height	112
Item Unit Length	145
Item Unit Weight	0,86
Item Unit Width	52
Item_UOM	pce

### Measurements

Length (l1)	71,5
Length (l2)	78,5
Length (l3)	71,5
z1	33,6
Z2	40,6
Z3	33,6

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905460687
Packaging GTIN PL4	06414905555369
Packaging Height PL1	105
Packaging Height PL4	645
Packaging Length PL1	176
Packaging Length PL4	800
Packaging Quantity PL1	3

Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,623
Packaging Weight PL4	282,3
Packaging Width PL1	202
Packaging Width PL4	1200

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)