
Product data sheet




GF Uponor S-Press tee 50-50-50

1046928

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

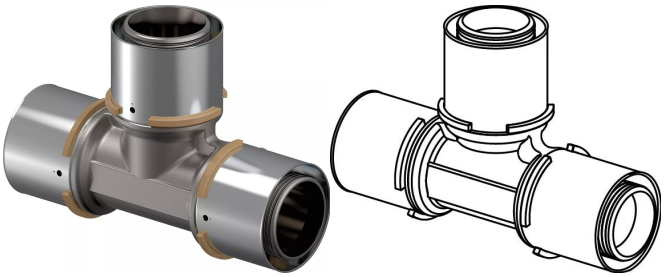

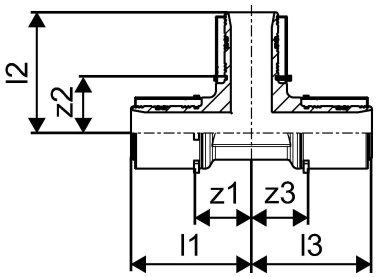

About GF Uponor S-Press tee

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee 50-50-50

1046928

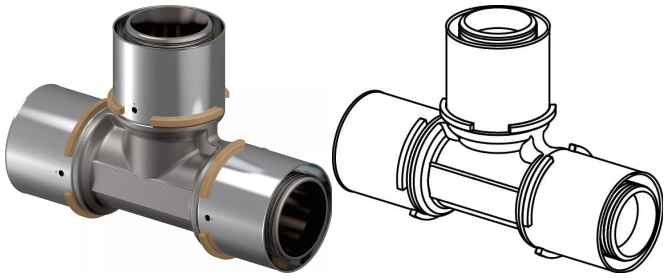

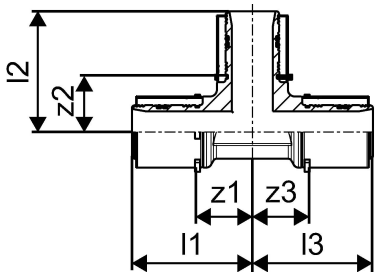

Product code

Item no EAN	4021598114258
Item no GF	35001046928
Item no GTIN	04021598114258
Item no LVI	1720944
Item no NRF	1627553
Item no VVS	045476050

Dimensions

Item Unit Height	53
Item Unit Length	160
Item Unit Weight	0,981
Item Unit Width	105
Item_UOM	pce

Measurements

Length (l1)	78,5
Length (l2)	78,5
Length (l3)	78,5
z1	40,6
Z2	40,6
Z3	40,6

Packaging

Packaging GTIN PL1	06414905460694
Packaging GTIN PL4	06414905555376
Packaging Height PL1	105
Packaging Height PL4	645
Packaging Length PL1	176

Packaging Length PL4	800
Packaging Quantity PL1	3
Packaging Quantity PL4	300
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00373296
Packaging Volume PL4	0,6192
Packaging Weight PL1	2,983
Packaging Weight PL4	318,3
Packaging Width PL1	202
Packaging Width PL4	1200

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+