


Uponor RS adapter S-Press 40-RS2

1046940

- Made of tin-plated brass
- Inspection windows on press sleeve
- Select the adapter based on the pipe size and then select the corresponding RS2 or RS3 base part.

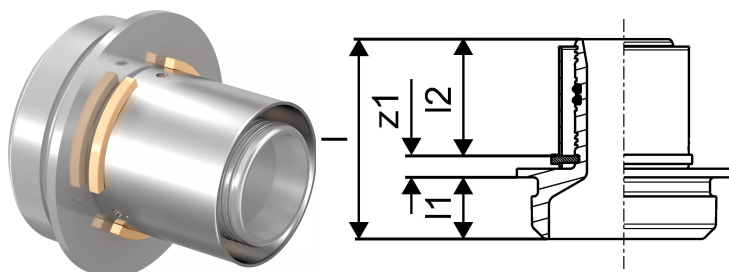

About Uponor RS adapter S-Press

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS adapter S-Press 40-RS2

1046940

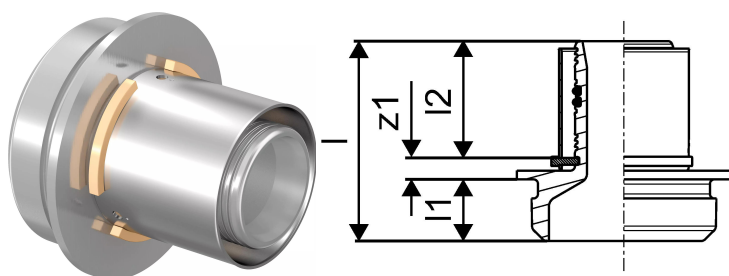

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598114364 |
| Item no GF | 35001046940 |
| Item no GTIN | 04021598114364 |
| Item no NRF | 5071231 |
| Item no VVS | 045450040 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 65 |
| Item Unit Length | 67 |
| Item Unit Weight | 0,38 |
| Item Unit Width | 67 |
| Item_UOM | pce |

Measurements

| | |
|-------------|------|
| LENGTH_L | 64,8 |
| Length (l1) | 20 |
| Length (l2) | 37,9 |
| z1 | 6,9 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905401772 |
| Packaging GTIN PL4 | 06414905401789 |
| Packaging Height PL1 | 85 |
| Packaging Height PL4 | 654 |
| Packaging Length PL1 | 120 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL4 | 480 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |

| | |
|----------------------|---------|
| Packaging Volume PL1 | 0,00102 |
| Packaging Volume PL4 | 0,62784 |
| Packaging Weight PL1 | 0,44 |
| Packaging Weight PL4 | 209,224 |
| Packaging Width PL1 | 100 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb