


## Uponor S-Press PLUS adapter female thread 20-Rp1"FT

**1070518**

- Made of tin-plated DZR brass

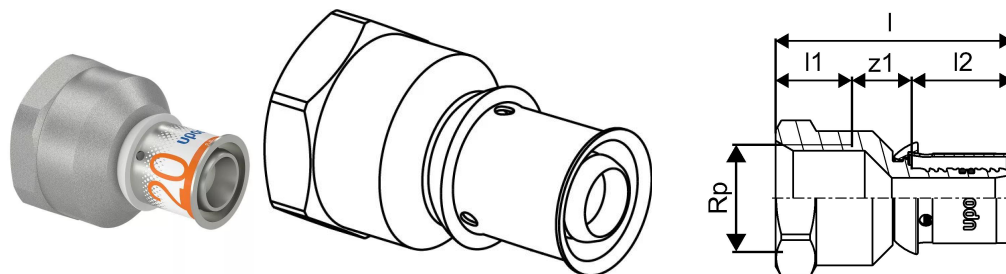

### About Uponor S-Press PLUS adapter female thread

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS adapter female thread 20-Rp1"FT

1070518

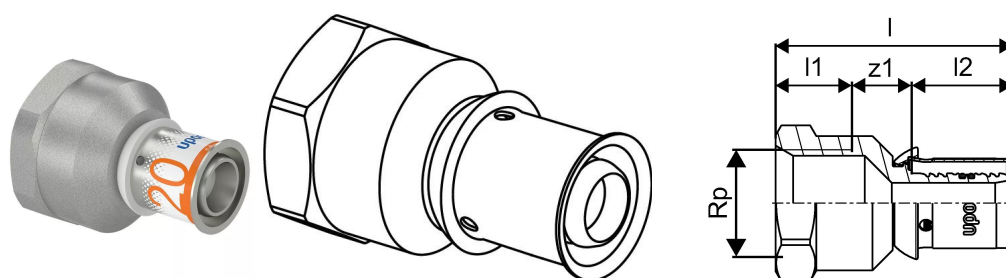

### Measurements

Female thread Rp	1
LENGTH_L	52,1
Length (l1)	19,1
Length (l2)	21,3
z1	11,7

### Product code

Item no EAN	6414905218387
Item no GF	35001070518
Item no GTIN	06414905218387
Item no LVI	1720184
Item no NOBB	55171896
Item no NRF	5114444
Item no RSK	1899423
Item no VVS	045482249

### Dimensions

Item Unit Height	44
Item Unit Length	52.1
Item Unit Weight	0,157
Item Unit Width	41
Item_UOM	pce

### Status

MTO (longer delivery times)

Item available on request, minimum lead time 2 weeks

### Packaging

Packaging GTIN PL1	06414905468348
Packaging GTIN PL3	06414905424108
Packaging GTIN PL4	06414905499274
Packaging Height PL1	89

Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	3,179
Packaging Weight PL3	12,976
Packaging Weight PL4	648,48
Packaging Width PL1	135
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)