


Uponor S-Press PLUS tee female thread 32-Rp1/2"FT-32

1070600

- Made of tin-plated DZR brass
- Female thread to BS EN 10226-1

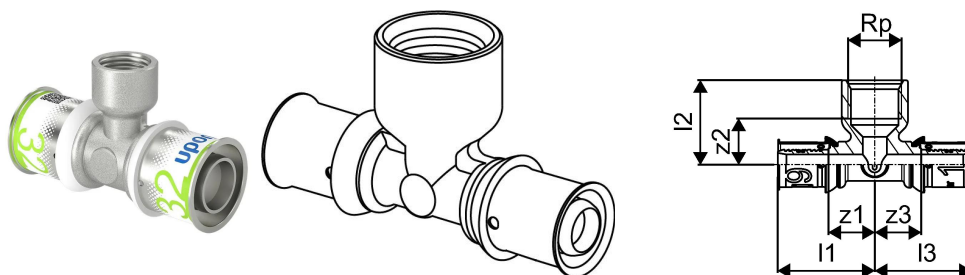

About Uponor S-Press PLUS tee female thread

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS tee female thread 32-Rp1/2"FT-32

1070600

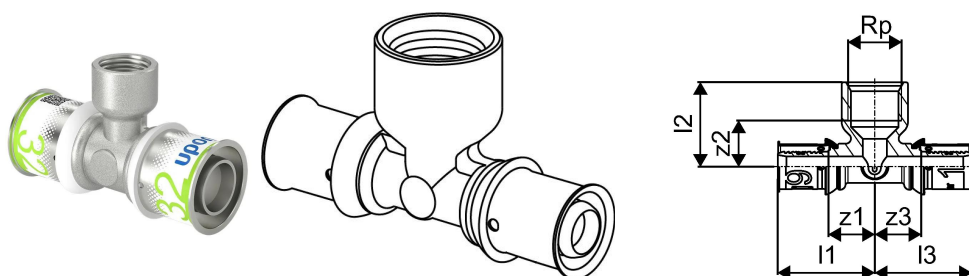

Measurements

| | |
|------------------|------|
| Female thread Rp | 1/2 |
| Length (l1) | 46,5 |
| Length (l2) | 40,3 |
| Length (l3) | 46,5 |
| z1 | 18,2 |
| z2 | 25,3 |
| z3 | 18,2 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905219209 |
| Item no GF | 35001070600 |
| Item no GTIN | 06414905219209 |
| Item no LVI | 1720774 |
| Item no NOBB | 55172577 |
| Item no NRF | 5114519 |
| Item no RSK | 1808036 |
| Item no VVS | 045478365 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 59.8 |
| Item Unit Length | 93 |
| Item Unit Weight | 0,261 |
| Item Unit Width | 39.3 |
| Item_UOM | pce |

Packaging

| | |
|----------------------|----------------|
| Packaging GTIN PL1 | 06414905468638 |
| Packaging GTIN PL3 | 06414905424740 |
| Packaging GTIN PL4 | 06414905499564 |
| Packaging Height PL1 | 89 |

| | |
|------------------------|-------------|
| Packaging Height PL3 | 188 |
| Packaging Height PL4 | 708 |
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 5 |
| Packaging Quantity PL3 | 20 |
| Packaging Quantity PL4 | 960 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,00211464 |
| Packaging Volume PL3 | 0,009321604 |
| Packaging Volume PL4 | 0,67968 |
| Packaging Weight PL1 | 1,344 |
| Packaging Weight PL3 | 5,636 |
| Packaging Weight PL4 | 296,16 |
| Packaging Width PL1 | 135 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb