
Product data sheet




GF Uponor S-Press PLUS stop end 32

1070624

- Made of tin-plated DZR brass

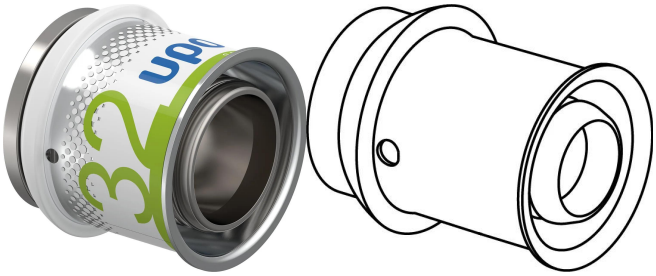



About GF Uponor S-Press PLUS stop end

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS stop end 32

1070624

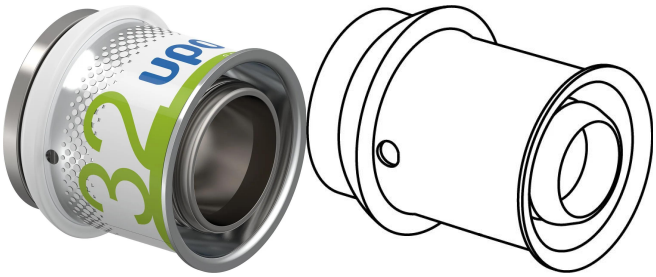



Product code

Item no EAN	6414905219445
Item no GF	35001070624
Item no GTIN	06414905219445
Item no LVI	1720798
Item no NOBB	55171412
Item no NRF	5114546
Item no RSK	1899449
Item no VVS	045313932

Dimensions

Item Unit Height	39.3
Item Unit Length	35
Item Unit Weight	0,103
Item Unit Width	39.3
Item_UOM	pce

Measurements

LENGTH_L	35
Length (l1)	6,7
Length (l2)	28,3

Packaging

Packaging GTIN PL1	06414905468843
Packaging GTIN PL4	06414905499779
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	1920
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,555
Packaging Weight PL4	237,12
Packaging Width PL1	67
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+