


Uponor S-PRESS PLUS U-tap elbow mixer 16-16-R1/2"MT

1070636

- Made of tin-plated DZR brass
- For in-wall mixer, or flushing tank connections in hygienic serial and loop installations.

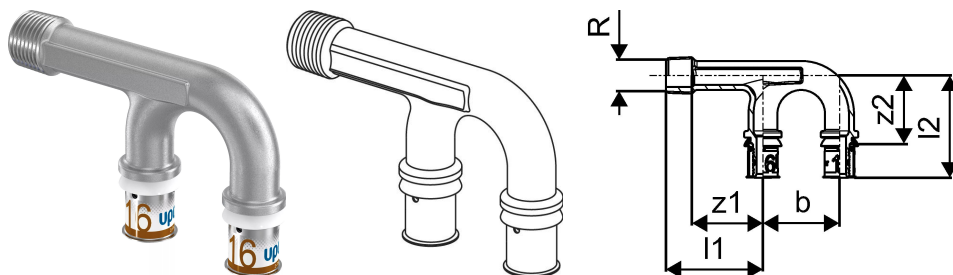

About Uponor S-PRESS PLUS U-tap elbow mixer

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-PRESS PLUS U-tap elbow mixer 16-16-R1/2"MT

1070636

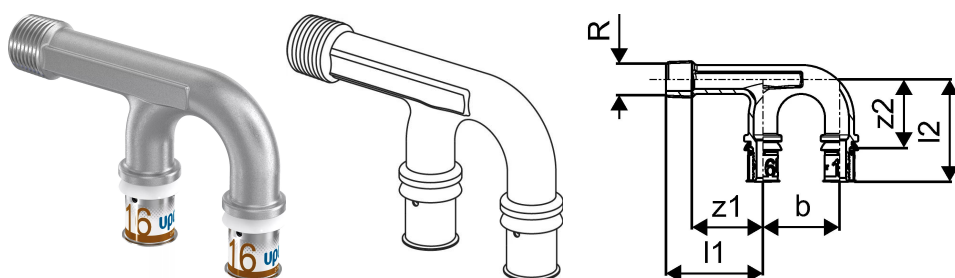

Product code

Item no EAN	6414905219520
Item no GF	35001070636
Item no GTIN	06414905219520

Dimensions

Item Unit Height	22
Item Unit Length	113
Item Unit Weight	0,237
Item Unit Width	70.7
Item_UOM	pce

Measurements

Length (l1)	57
Length (l2)	60
Male_thread_R	1/2
Z Measurement b	45
z1	41,5
Z2	40,2

Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905468928
Packaging GTIN PL4	06414905499854
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	5
Packaging Quantity PL4	960

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	1,265
Packaging Weight PL4	266,88
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb