


Uponor S-Press PLUS tap elbow valve box 16-Rp3/4"FT

1070643

- Made of tin-plated DR brass
- For on wall installation with valve and cover box

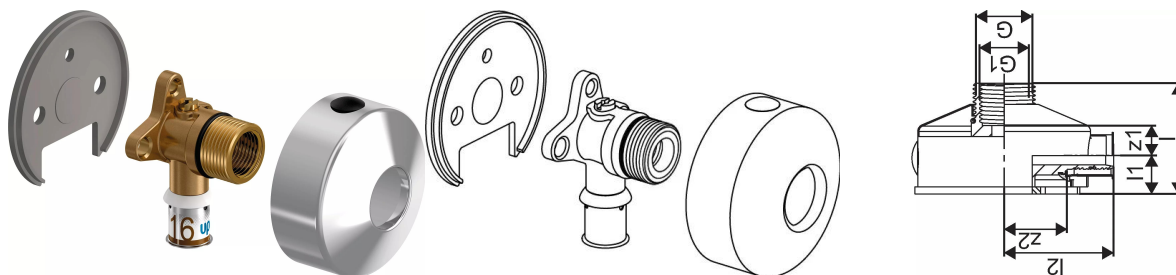

About Uponor S-Press PLUS tap elbow valve box

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm


-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS tap elbow valve box 16-Rp3/4"FT

1070643

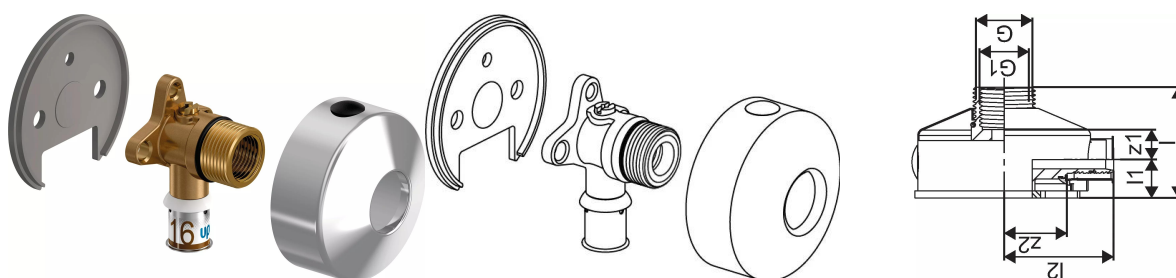

Technical data

Item no EAN	6414905219599
Item no GTIN	06414905219599
Item no VVS	045475516
Item no LVI	1720807
Item (unit of measurement)	pce
Female_thread_Rp2	1/2" inch
Length (l)	47 mm
Length (l1)	31 mm
Length (l2)	47 mm
Male_thread_R2	3/4" inch
z2	27 mm
Packaging Quantity 1	1
Packaging Quantity 4	12
Packaging Material short PL1	LDPE
Packaging Material short PL2	PAP
Packaging Material PL1	Low density polyethylene
Packaging Material PL2	Paper
Packaging GTIN PL1	06414905468942
Packaging GTIN PL2	06414900326551
Item Unit Height	77 mm
Item Unit Weight	0,238 kg
Item Unit Width	84 mm

Technical documents

Download documents here

E_enquiries.uk@uponor.com

www.uponor.com/en-gb