


## Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c80mm

### 1070661

- Rotation protected installed on mounting angel

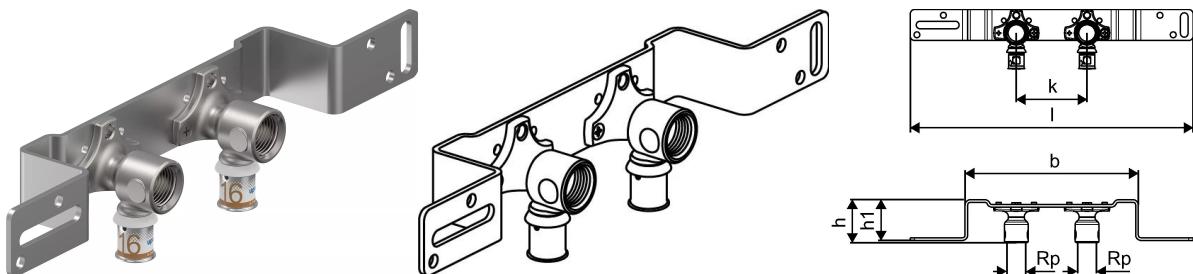

## About Uponor S-Press PLUS tap elbow mount.Unit

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification


- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- 2101339 : Manifolds and adapters

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c80mm 1070661

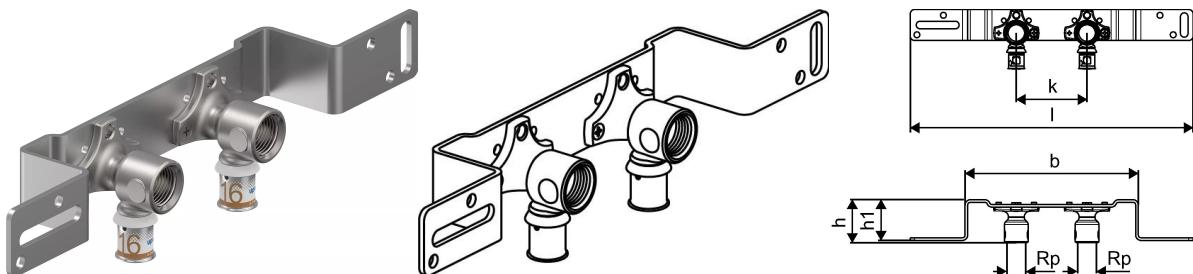

### Measurements

Female thread Rp	0,5
LENGTH_L	320
Z Measurement b	196
Z Measurement h	47,5
Z Measurement h1	46
Z Measurement k	80

### Product code

Item no EAN	6414905219773
Item no GF	35001070661
Item no GTIN	06414905219773

### Dimensions

Item Unit Height	48,5
Item Unit Length	320
Item Unit Weight	0,598
Item Unit Width	67
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905628483
Packaging GTIN PL3	06414905628490
Packaging GTIN PL4	06414905293384
Packaging Height PL1	50
Packaging Height PL3	100
Packaging Height PL4	624
Packaging Length PL1	320
Packaging Length PL3	350

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Quantity PL4	300
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00112
Packaging Volume PL3	0,007
Packaging Volume PL4	0,59904
Packaging Weight PL1	0,608
Packaging Weight PL3	3,14
Packaging Weight PL4	213,4
Packaging Width PL1	70
Packaging Width PL3	200
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)