


## Uponor S-Press PLUS tap elbow mount.Unit 16-Rp1/2"FT c/c150mm

1070662

- Tap elbow assembly
- Rotation protected installed on mounting angle

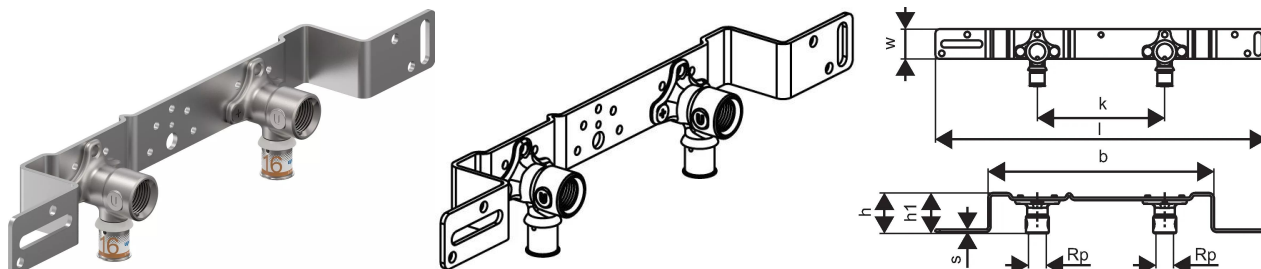

### About Uponor S-Press PLUS tap elbow mount.Unit

#### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS tap elbow mount. Unit 16-Rp1/2"FT c/c150mm

1070662

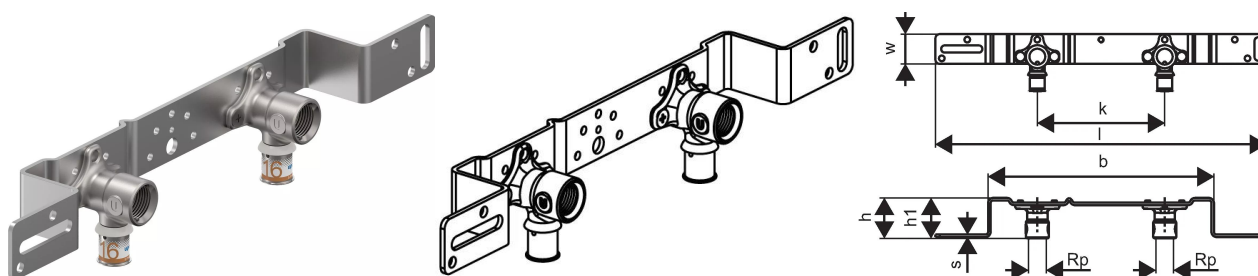

### Measurements

Female thread Rp	0,5
LENGTH_L	440
Z Measurement b	266
Z Measurement h	47,5
Z Measurement h1	57
Z Measurement k	150

### Product code

Item no EAN	6414905219780
Item no GF	35001070662
Item no GTIN	06414905219780
Item no VVS	045401316

### Dimensions

Item Unit Height	48.5
Item Unit Length	440
Item Unit Weight	0,643
Item Unit Width	67
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905663200
Packaging GTIN PL4	06414905663613
Packaging Height PL1	82
Packaging Height PL4	1090
Packaging Length PL1	477
Packaging Length PL4	1200
Packaging Quantity PL1	5

Packaging Quantity PL4	380
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,01056078
Packaging Volume PL4	1,0464
Packaging Weight PL1	3,3
Packaging Weight PL4	255
Packaging Width PL1	270
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)