


## Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

### 1070678

- With plated copper pipe (EN 1057) 15 x 1 mm or 22 x 1 mm
- Connection of the plated copper pipe can be made using a standard BS EN 1254-2 compression type fitting,
- or a compatible metal press connection.

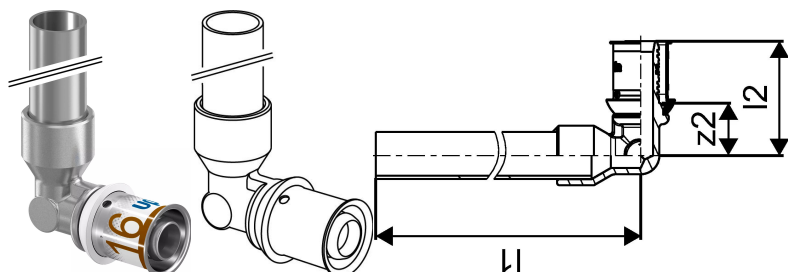

## About Uponor S-Press PLUS radi elbow adapter plated

### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS radi elbow adapter plated 16-15CU l=350mm

1070678

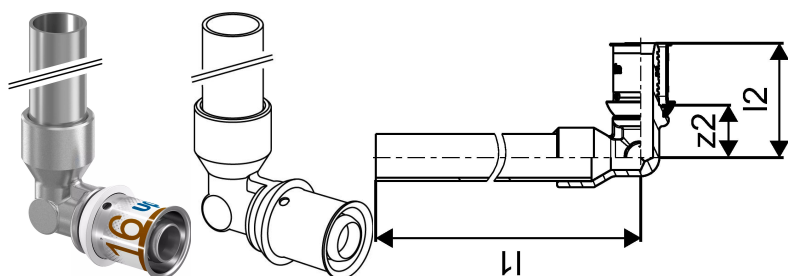

### Product code

Item no EAN	6414905219940
Item no GF	35001070678
Item no GTIN	06414905219940
Item no LVI	1720808
Item no RSK	1896565
Item no VVS	404730016

### Dimensions

Item Unit Height	46
Item Unit Length	376.6
Item Unit Weight	0,169
Item Unit Width	21.9
Item_UOM	pce

### Measurements

Length (I1)	366
Length (I2)	36,5
Z2	16,7

### Packaging

Packaging GTIN PL1	06414905286898
Packaging GTIN PL4	06414905286904
Packaging Height PL1	80
Packaging Height PL4	704
Packaging Length PL1	395
Packaging Length PL4	1200
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	20

Packaging Quantity PL4	1680
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00632
Packaging Volume PL4	0,67584
Packaging Weight PL1	3,502
Packaging Weight PL4	318,168
Packaging Width PL1	200
Packaging Width PL4	800

## Technical data

Recycling Text Block PL1	Corrugated fibreboard
--------------------------	-----------------------

## Technical documents

[Download documents here](#)

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)