


## Uponor Radi Pipe white PN6 12x1,1 100m

1085245

- Operating pressure 6 bar
- Coils
- White

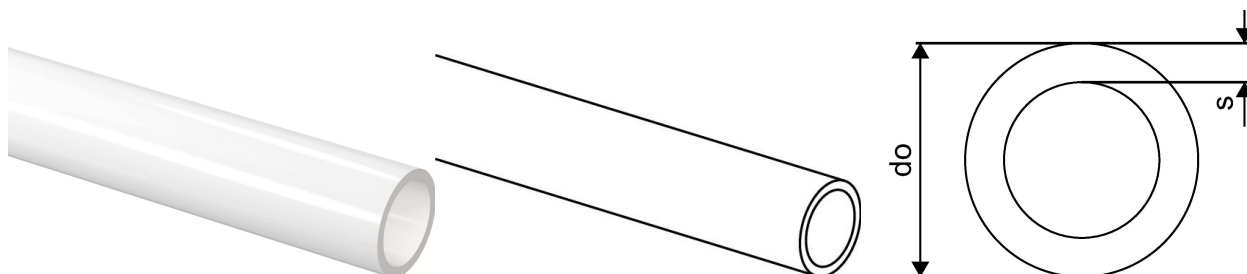

### About Uponor Radi Pipe white PN6

#### Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- Application class 5 - high temperature radiators
- Fire classification E according to DIN EN 13501-1.

#### Application

- Heating: The permanent operating temperature ranges up to 90°C. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Uponor Radi Pipe white PN6 12x1,1 100m

1085245

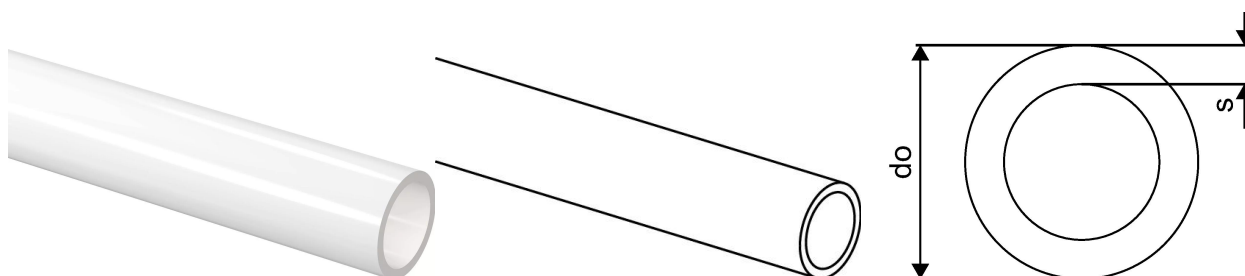

### Technical data

Item no EAN	6414905514526
Item no GTIN	06414905514526
Item (unit of measurement)	m
Packaging Quantity 1	100
Packaging Quantity 4	1500
Packaging GTIN PL1	06414905283729
Packaging GTIN PL4	06414905283736
Item Unit Height	12 mm
Item Unit Weight	0,03 kg
Item Unit Width	12 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)