


## Uponor S-Press PLUS adapter baseboard 0-G1/2"MT-16

### 1094219

- For baseboard mounting and the universal connection of Uponor MLC and Unipipe PLUS pipes with outside diameters 16 and 20 mm to valve radiators with connection from the bottom
- Thread acc. to EN ISO 228-1

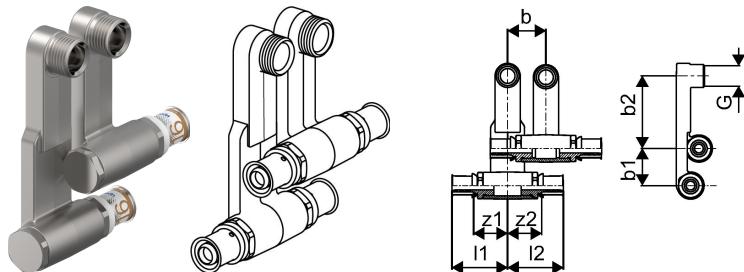

## About Uponor S-Press PLUS adapter baseboard

### Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification



-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor S-Press PLUS adapter baseboard 0-G1/2"MT-16 1094219

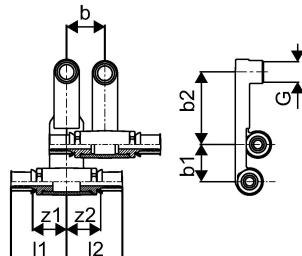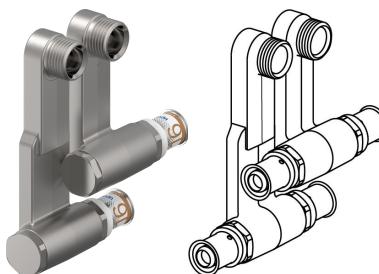

### Measurements

Cylindric_thread_G	1/2
Length (l1)	27,5
Length (l2)	51
Z Measurement b	35
Z Measurement b1	33,8
Z Measurement b2	66,2
Z2	31,2

### Product code

Item no EAN	6414905278213
Item no GF	35001094219
Item no GTIN	06414905278213

### Dimensions

Item Unit Height	34
Item Unit Length	124
Item Unit Weight	0,617
Item Unit Width	114
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905423194
Packaging GTIN PL4	06414905423200
Packaging Height PL1	89
Packaging Height PL4	678
Packaging Length PL1	176
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	192
Packaging Type PL1	Base_Box

Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL4	0,65088
Packaging Weight PL1	0,697
Packaging Weight PL4	158
Packaging Width PL1	135
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)