
Product data sheet



GF Uponor Ecoflex VIP Thermo Pipe Twin 2x25x2,3/140

1118580

- Heating and Cooling
- Twin PE-Xa carrier pipes with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- VIP + PEX foam, HDPE casing

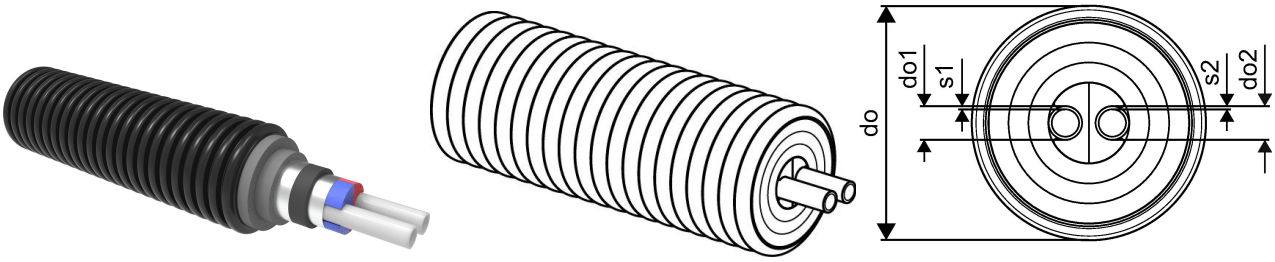

About GF Uponor Ecoflex VIP Thermo Pipe Twin

Specification

- Highest thermally efficient VIP (Vacuum Insulated Panel)
λ 0.004 w*m/K
- Highest thermal resistance for complete insulation assembly
- Flexible, pre-insulated, self-compensating plastic pipe system manufactured to BS EN 15632 and BS EN 17414.
- Carrier pipe: cross-linked polyethylene (PE-Xa) pipe based on BS EN ISO 15875, natural Coloured, PN 6 (SDR 11)
- Oxygen tightness based on BS EN 15632 to ISO 17455 and DIN 4726
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)

Application


- Ideal for low-carbon heating and cooling technologies
- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of up to 60 tons

Certification

-

GF Uponor Ecoflex VIP Thermo Pipe Twin 2x25x2,3/140

1118580

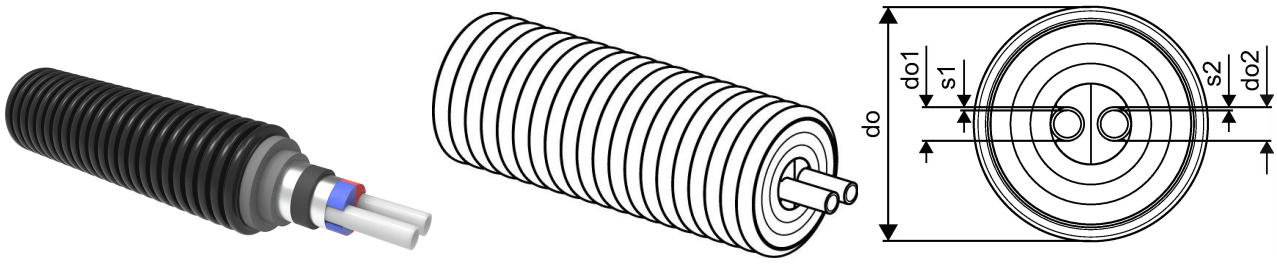

Measurements

Bending radius M	0,4
Outer Diameter_do	140
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	2,3
Wall thickness_s2	2,3

Status

Item Available Till date	2027-06-30T00:00:00.000+0200

Product code

Item no EAN	6414905519095
Item no GF	35001118580
Item no GTIN	06414905519095
Item no LVI	3010242
Item no NRF	8360957
Item no RSK	2266367
Item no VVS	087808425
Item Replacement 1	1160610

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,7
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905552924

Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	340
Packaging Width PL1	1500

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+