


Uponor Ecoflex VIP Aqua Twin 63x8,6-40x5,5/200

1132671

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- Coloured centre profile to identify flow and return lines
- VIP + PEX foam, HDPE casing

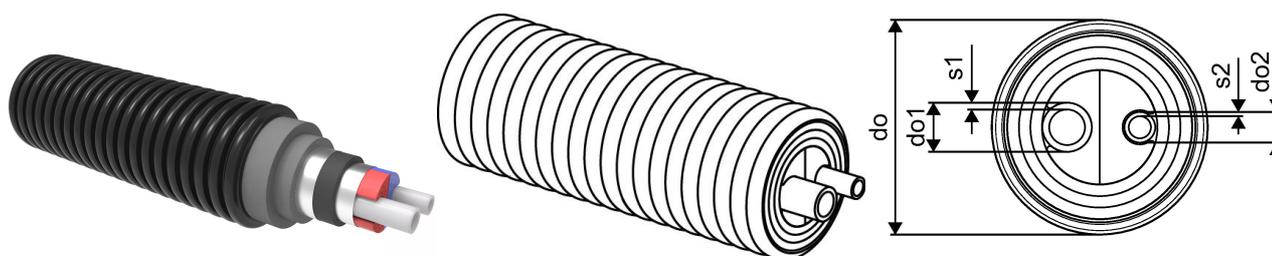

About Uponor Ecoflex VIP Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

Application


- Buried installations for the transport of warm tap water
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex VIP Aqua Twin 63x8,6-40x5,5/200

1132671

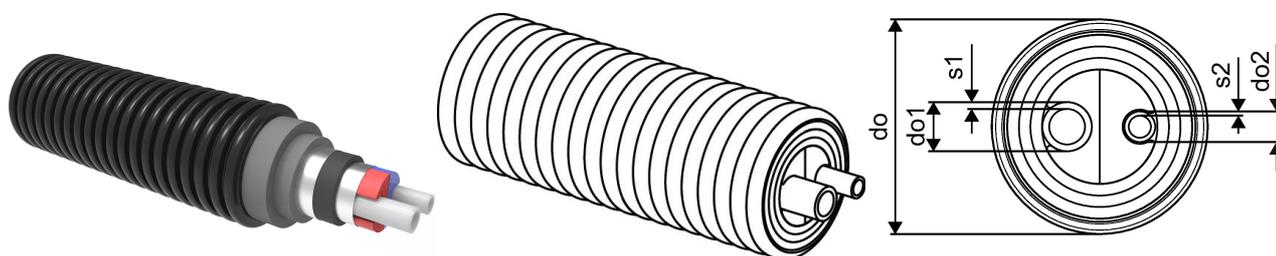

Measurements

Bending radius M	1,1
Outer Diameter_do	200
Outer Diameter_do1	63
Outer Diameter_do2	40
Wall thickness_s1	8,6
Wall thickness_s2	5,5

Product code

Item no EAN	6414900038942
Item no GTIN	06414900038942
Item no LVI	3010137
Item no NRF	8361287
Item no RSK	2266385
Item no VVS	087364263

Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	4,87
Item Unit Width	200
Item_UOM	m

Packaging

Packaging GTIN PL1	06414900038959
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	8,064
Packaging Weight PL1	487

Packaging Width PL1

1400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb