


## GF Malleable Fittings elbow red 92 90deg 1 - 1 1/4 G

**1153064**

- Elbow 90°, female thread reduced, ISO/EN A4
- Male / female

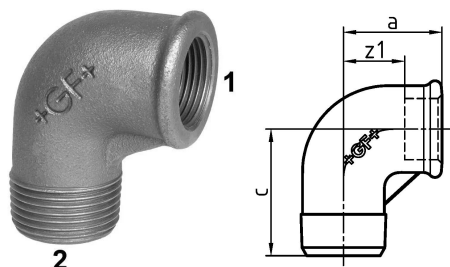

### About GF Malleable Fittings elbow red 92 90deg

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings elbow red 92 90deg 1 - 1 1/4 G

1153064



### Status

Item Available From date

2025-09-05

### Product code

Item no EAN 7611205408329

Item no GF 770092227

Item no GTIN 07611205408329

Item no RSK 1306065

### Dimensions

Item Unit Height 46

Item Unit Length 66

Item Unit Weight 0,355

Item Unit Width 82

Item\_UOM pce

### Packaging

Packaging GTIN PL1 07611205208325

Packaging GTIN PL4 06414900186711

Packaging Height PL1 200

Packaging Height PL4 729

Packaging Length PL1 260

Packaging Length PL4 1200

Packaging Quantity PL1 30

Packaging Quantity PL4 1620

Packaging Type PL1 Base\_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,00988

Packaging Volume PL4 0,69984

Packaging Weight PL1 10,864

Packaging Weight PL4 595,1

Packaging Width PL1	190
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)