


## GF Malleable Fittings 241 - reducing bush, galvanized 1 1/4 - 3/4

**1153814**

- Reducing bush, ISO/EN N4

- Forms I, II, III are available only as marked under column "Form", Form I can also be supplied
- with continuous internal thread (=241D).
- ST ... these types of fittings are made from steel (galvanised finish = electroplated) and not
- suitable for drinking water installations.

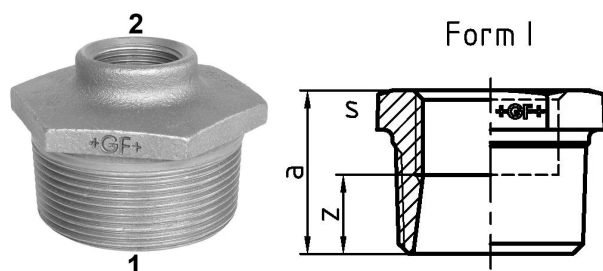

### About GF Malleable Fittings 241 - reducing bush, galvanized

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings 241 - reducing bush, galvanized 1 1/4 - 3/4

1153814



### Product code

Item no EAN	7611205425340
Item no GF	770241230
Item no GTIN	07611205425340
Item no LVI	0855128
Item no NOBB	60639060
Item no NRF	1366792
Item no RSK	1319292
Item no VVS	004241450

### Dimensions

Item Unit Height	46
Item Unit Length	53
Item Unit Weight	0,182
Item Unit Width	31
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205225346
Packaging GTIN PL4	06414900125109
Packaging Height PL1	200
Packaging Height PL4	534
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	80
Packaging Quantity PL4	2880
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,51264

Packaging Weight PL1	14,774
Packaging Weight PL4	544,16
Packaging Width PL1	190
Packaging Width PL4	800
<b>Measurements</b>	
Wall thickness_s	46
Z Measurement a	31
Z Measurement a	31
Z MEASUREMENT S	46
Z	16

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212  
E  
customerservice.uk.bfs@georgfi  
scher.com