


GF Malleable Fittings plug 294 1/2 B

1154166

- Plug
- Square nut with pre-drilled hole

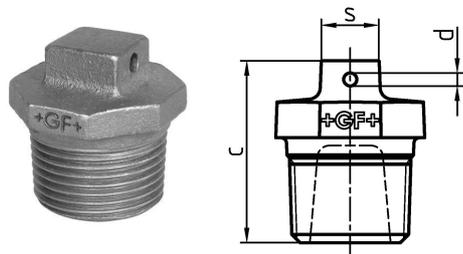

About GF Malleable Fittings plug 294

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings plug 294 1/2 B

1154166

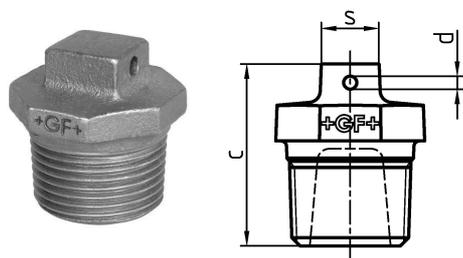

Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205330507
Item no GF	770294104
Item no GTIN	07611205330507
Item no RSK	1254030
Item no VVS	004294104

Dimensions

Item Unit Height	27
Item Unit Length	29
Item Unit Weight	0,064
Item Unit Width	32
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205530501
Packaging GTIN PL2	07611205130503
Packaging GTIN PL4	06414900120845
Packaging Height PL1	27
Packaging Height PL2	200
Packaging Height PL4	534
Packaging Length PL1	155
Packaging Length PL2	260
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL2	250
Packaging Quantity PL4	9000
Packaging Type PL1	Plastic_Bag

Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00221805
Packaging Volume PL2	0,00988
Packaging Volume PL4	0,51264
Packaging Weight PL1	0,6453475
Packaging Weight PL2	16,3476875
Packaging Weight PL4	613,51675
Packaging Width PL1	530
Packaging Width PL2	190
Packaging Width PL4	800
Measurements	
Wall thickness_s	11

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb