


GF Malleable Fittings 294 - plug, with hole in square head, black 2

1154171

- Plug, with hole in square head

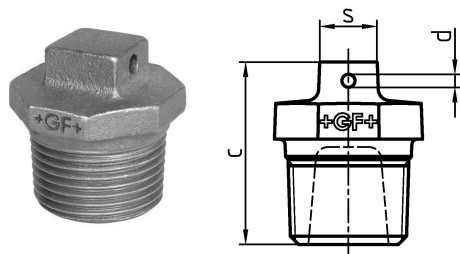

About GF Malleable Fittings 294 - plug, with hole in square head, black

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 294 - plug, with hole in square head, black 2

1154171

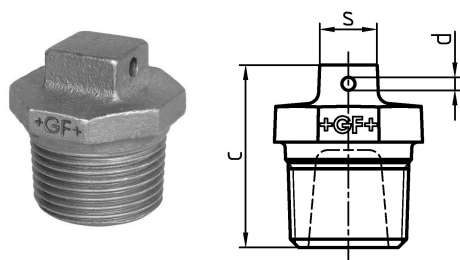**Status**

Item Available From date

2025-09-05

Product code

Item no EAN	7611205330552
Item no GF	770294109
Item no GTIN	07611205330552
Item no RSK	1254040
Item no VVS	004294112

Dimensions

Item Unit Height	65
Item Unit Length	70
Item Unit Weight	0,498
Item Unit Width	54
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205130558
Packaging GTIN PL4	06414900120791
Packaging Height PL1	200
Packaging Height PL4	534
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	30
Packaging Quantity PL4	1080
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,51264
Packaging Weight PL1	15,154

Packaging Weight PL4	557,84
Packaging Width PL1	190
Packaging Width PL4	800
Measurements	
Wall thickness_s	27
Z Measurement d	2
Z MEASUREMENT S	27

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com