


GF Malleable Fittings 329 - screwed flange, drilled, 4 holes, black 4

1154297

- Screwed flange, drilled, 4 holes
- Diameter of pitch circle and sealing face compatible to EN 1092-2 and DIN 2566.
- * 4 holes

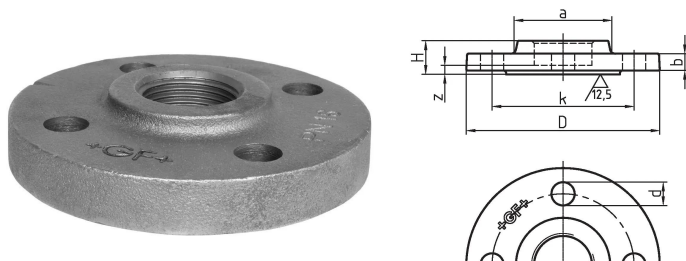

About GF Malleable Fittings 329 - screwed flange, drilled, 4 holes, black

Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 329 - screwed flange, drilled, 4 holes, black 4

1154297



Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205335083
Item no GF	770329112
Item no GTIN	07611205335083
Item no RSK	1254119
Item no VVS	004328116

Dimensions

Item Unit Height	220
Item Unit Length	220
Item Unit Weight	4,5
Item Unit Width	38
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205135089
Packaging GTIN PL4	06414900120203
Packaging Height PL1	200
Packaging Height PL4	534
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL4	108
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,51264
Packaging Weight PL1	13,714

Packaging Weight PL4	506
----------------------	-----

Packaging Width PL1	190
---------------------	-----

Packaging Width PL4	800
---------------------	-----

Measurements

Z Measurement a	140
-----------------	-----

Z Measurement a	140
-----------------	-----

Z Measurement b	20
-----------------	----

Z Measurement d	220
-----------------	-----

Z Measurement H	38
-----------------	----

Z Measurement k	180
-----------------	-----

Z	2
---	---

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com