Product data sheet




GF Malleable Fittings 330 - union flat seat, black 3/4

1154312

- Union flat seat, ISO/EN U1

- Supplied without sealing gaskets; a and z1 include the seal thickness as per table "Sealing Gasket Dimension".
- 374 G ... refers to the thread size G according to ISO 228 of the union nut 374.
- * Inside hexagon

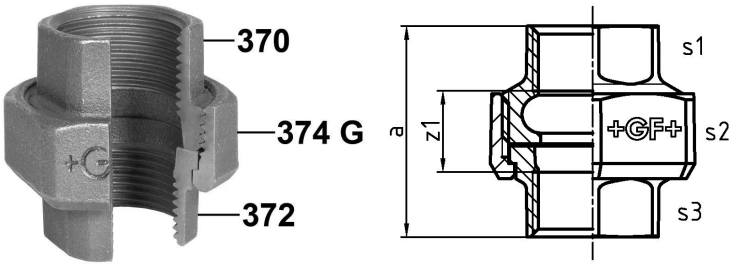

About GF Malleable Fittings 330 - union flat seat, black

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5
to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT)
acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment
Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees,
between 120-300 degrees use interpolated values,
Max. 20bar at 300 degrees
- Sizes from ¼" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 330 - union flat seat, black 3/4

1154312

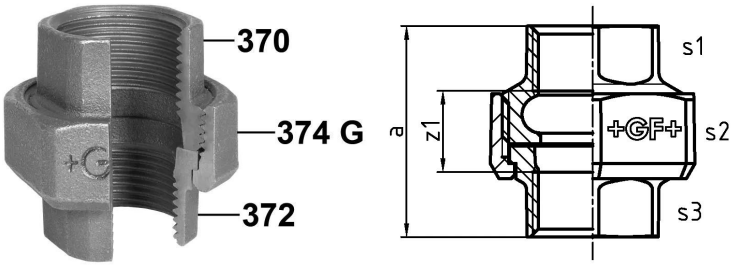

Product code

Item no EAN	7611205335243
Item no GF	770330105
Item no GTIN	07611205335243
Item no RSK	1260805
Item no VVS	004330106

Dimensions

Item Unit Height	48
Item Unit Length	53
Item Unit Weight	0,263
Item Unit Width	52
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205535247
Packaging GTIN PL2	07611205135249
Packaging GTIN PL4	06414900120166
Packaging Height PL1	48
Packaging Height PL2	200
Packaging Height PL4	729
Packaging Length PL1	270
Packaging Length PL2	260
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL2	50
Packaging Quantity PL4	2700
Packaging Type PL1	Plastic_Bag

Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0068688
Packaging Volume PL2	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	2,64
Packaging Weight PL2	13,3
Packaging Weight PL4	743,2
Packaging Width PL1	530
Packaging Width PL2	190
Packaging Width PL4	800

Measurements

Wall thickness_s1	31
Wall thickness_s2	48
Wall thickness s3	31
Z Measurement A	52
Z Measurement d	3/4
z1	22

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+