


## GF Malleable Fittings union flat seat 335 1/2 B

**1154357**

- Union flat seat
- Supplied without sealing gaskets
- c + z2 include the seal thickness as per table "Sealing Gasket Dimension".
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374

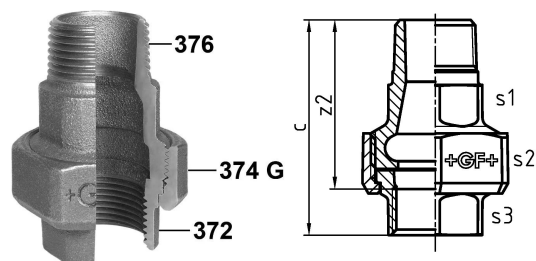

### About GF Malleable Fittings union flat seat 335

#### Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings union flat seat 335 1/2 B

1154357



### Status

Item Available From date

2025-09-05

### Product code

Item no EAN	7611205336783
Item no GF	770335104
Item no GTIN	07611205336783
Item no RSK	1260846
Item no VVS	004335104

### Dimensions

Item Unit Height	41
Item Unit Length	45
Item Unit Weight	0,2181
Item Unit Width	66
Item_UOM	pce

### Packaging

Packaging GTIN PL1	07611205136789
Packaging GTIN PL4	06414900119955
Packaging Height PL1	200
Packaging Height PL4	534
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	80
Packaging Quantity PL4	2880
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,51264
Packaging Weight PL1	17,662

Packaging Weight PL4	648,128
Packaging Width PL1	190
Packaging Width PL4	800

## Measurements

Wall thickness_s1	26
Wall thickness_s2	41
Wall thickness s3	26
Z2	53

## Technical documents

[Download documents here](#)

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)