


GF Malleable Fittings union flat seat 335 1 1/4 B

1154360

- Union flat seat
- Supplied without sealing gaskets
- c + z2 include the seal thickness as per table "Sealing Gasket Dimension".
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374

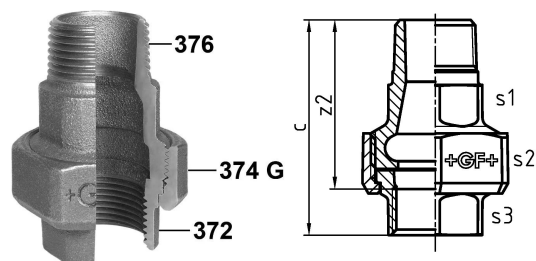

About GF Malleable Fittings union flat seat 335

Specification

- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings union flat seat 335 1 1/4 B

1154360



Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205336844
Item no GF	770335107
Item no GTIN	07611205336844
Item no RSK	1260853
Item no VVS	004335110

Dimensions

Item Unit Height	67
Item Unit Length	74
Item Unit Weight	0,7112
Item Unit Width	90
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205136840
Packaging GTIN PL4	06414900119924
Packaging Height PL1	200
Packaging Height PL4	729
Packaging Length PL1	260
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL4	1080
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	14,438

Packaging Weight PL4	788,096
----------------------	---------

Packaging Width PL1	190
---------------------	-----

Packaging Width PL4	800
---------------------	-----

Measurements

Wall thickness_s1	48
-------------------	----

Wall thickness_s2	67
-------------------	----

Wall thickness s3	48
-------------------	----

Z2	71
----	----

Technical documents

[Download documents here](#) 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb