Product data sheet




GF Malleable Fittings 341 - union taper seat, black 3/4

1154417

- Union taper seat, ISO/EN U12

- Torque and notes for installation please find in "Technical Product Notes".
- 374 G ... refers to the thread size G according to ISO 228 of the union nut 374.

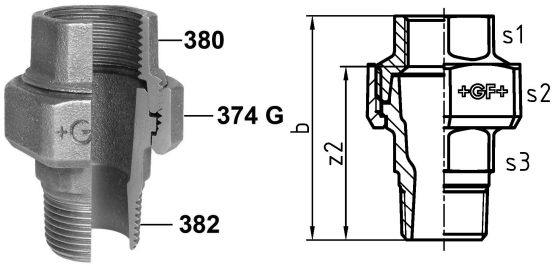

About GF Malleable Fittings 341 - union taper seat, black

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5
to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT)
acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment
Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees,
between 120-300 degrees use interpolated values,
Max. 20bar at 300 degrees
- Sizes from ¼" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 341 - union taper seat, black 3/4

1154417

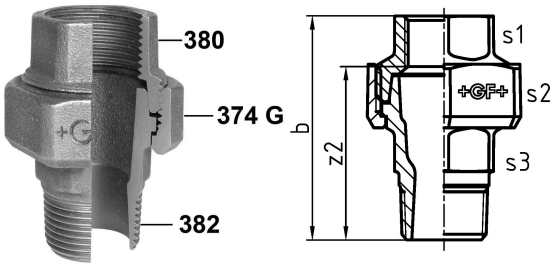

Product code

Item no EAN	7611205338510
Item no GF	770341105
Item no GTIN	07611205338510
Item no LVI	0755200
Item no NOBB	60639244
Item no NRF	1366976
Item no RSK	1260942
Item no VVS	004341106

Dimensions

Item Unit Height	48
Item Unit Length	53
Item Unit Weight	0,313
Item Unit Width	72
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205538514
Packaging GTIN PL2	07611205138516
Packaging GTIN PL4	06414900119696
Packaging Height PL1	48
Packaging Height PL2	200
Packaging Height PL4	729
Packaging Length PL1	155
Packaging Length PL2	260
Packaging Length PL4	1200
Packaging Quantity PL1	10

Packaging Quantity PL2	40
Packaging Quantity PL4	2160
Packaging Type PL1	Plastic_Bag
Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0039432
Packaging Volume PL2	0,00988
Packaging Volume PL4	0,69984
Packaging Weight PL1	3,14
Packaging Weight PL2	12,66
Packaging Weight PL4	708,64
Packaging Width PL1	530
Packaging Width PL2	190
Packaging Width PL4	800

Measurements

Wall thickness_s1	31
Wall thickness_s2	48
Wall thickness s3	30
Z Measurement b	72
Z Measurement d	3/4
Z2	57

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+