


GF Malleable Fittings union angular deviator 346 max. 6° 3/4 G

1154489

- Union, spherical seat angular deviation max. 6°, ISO/EN U11
- Torque and notes for installation please find in "Technical Product Notes".
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374.

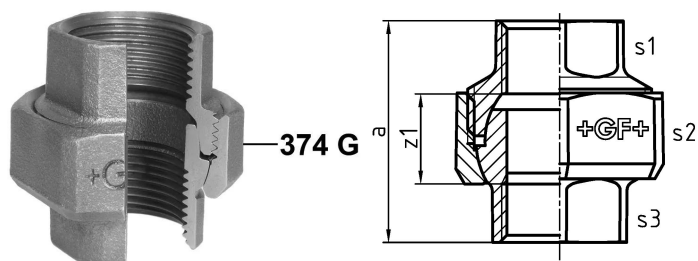

About GF Malleable Fittings union angular deviator 346 max. 6°

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings union angular deviator 346 max. 6° 3/4 G

1154489

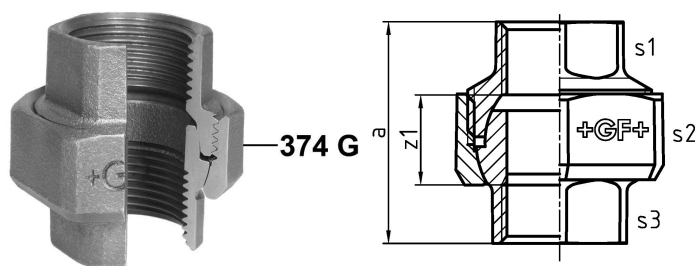

Status

Item Available From date

2025-09-05

Product code

Item no EAN 7611205440077

Item no GF 770346205

Item no GTIN 07611205440077

Item no RSK 1260924

Dimensions

Item Unit Height 48

Item Unit Length 53

Item Unit Weight 0,2664

Item Unit Width 52

Item_UOM pce

Packaging

Packaging GTIN PL1 07611205240073

Packaging GTIN PL4 06414900240468

Packaging Height PL1 200

Packaging Height PL4 729

Packaging Length PL1 260

Packaging Length PL4 1200

Packaging Quantity PL1 50

Packaging Quantity PL4 2700

Packaging Type PL1 Base_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,00988

Packaging Volume PL4 0,69984

Packaging Weight PL1 13,534

Packaging Weight PL4 739,28

Packaging Width PL1	190
---------------------	-----

Packaging Width PL4	800
---------------------	-----

Measurements

Wall thickness_s1	31
-------------------	----

Wall thickness_s2	48
-------------------	----

Wall thickness s3	31
-------------------	----

z1	23
----	----

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb