


## GF Malleable Fittings union angular deviator 346 max. 6° 1 1/2 G

**1154492**

- Union, spherical seat angular deviation max. 6°, ISO/EN U11
- Torque and notes for installation please find in "Technical Product Notes".
- '374 G' refers to the thread size 'G' according to ISO 228 of the union nut 374.

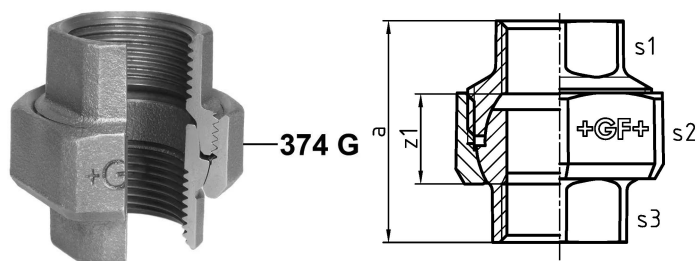

### About GF Malleable Fittings union angular deviator 346 max. 6°

#### Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

#### Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

## GF Malleable Fittings union angular deviator 346 max. 6° 1 1/2 G

1154492

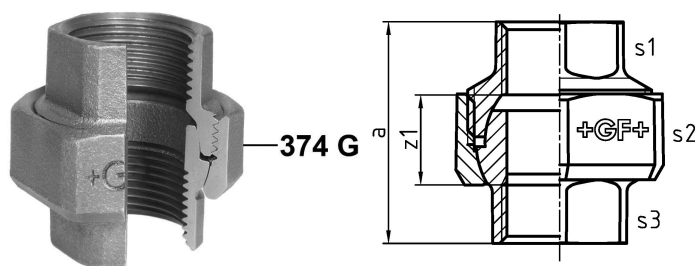

### Status

Item Available From date

2025-09-05

### Product code

Item no EAN 7611205440107

Item no GF 770346208

Item no GTIN 07611205440107

Item no RSK 1260931

### Dimensions

Item Unit Height 74

Item Unit Length 81

Item Unit Weight 0,797

Item Unit Width 75

Item\_UOM pce

### Packaging

Packaging GTIN PL1 07611205240103

Packaging GTIN PL4 06414900240437

Packaging Height PL1 200

Packaging Height PL4 729

Packaging Length PL1 260

Packaging Length PL4 1200

Packaging Quantity PL1 15

Packaging Quantity PL4 810

Packaging Type PL1 Base\_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,00988

Packaging Volume PL4 0,69984

Packaging Weight PL1 12,169

Packaging Weight PL4 665,57

Packaging Width PL1	190
---------------------	-----

Packaging Width PL4	800
---------------------	-----

## Measurements

Wall thickness_s1	54
-------------------	----

Wall thickness_s2	73
-------------------	----

Wall thickness s3	54
-------------------	----

z1	32
----	----

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)