


GF Malleable Fittings 471 - bracket elbow, galvanized 3/8

1154716

- Bracket elbow

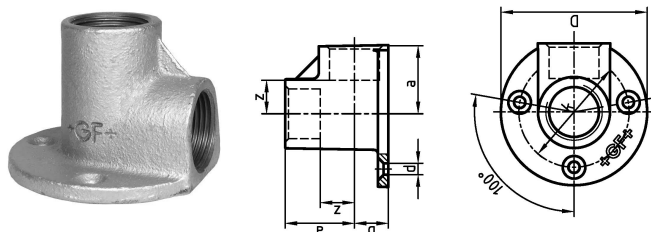

About GF Malleable Fittings 471 - bracket elbow, galvanized

Specification


- Unique Whiteheart ductile Cast Iron to EN-GJMW-400-5 to BS EN 1562, design symbol A
- Thread type BSP - R or Rp to BS EN 10226-1 / ISO 7-1
- Union or flat-nut thread types to BS EN 228-1
- Manufactured to BS EN 10242 (ISO 49)
- Cast Iron is fire class A1 to BS EN 13501-1 (CWFT) acc. to Commission Decision 96/603/EC (as amended)
- Natural Black or Galvanized (99.995 zinc)
- Coated with medical-grade oil for corrosion protection
- Suitable for systems covered by the Pressure Equipment Safety Regulation:2016
- Max. pressure 25 bar up to 120 degrees, between 120-300 degrees use interpolated values, Max. 20bar at 300 degrees
- Sizes from 1/4" to 4"

Application

- Heating - LTHW, MTHW and HTHW
- Steam
- Chilled water and cooling applications
- Compressed air
- Fuel gases
- Fuel oils
- Fire defence / sprinklers

GF Malleable Fittings 471 - bracket elbow, galvanized 3/8

1154716

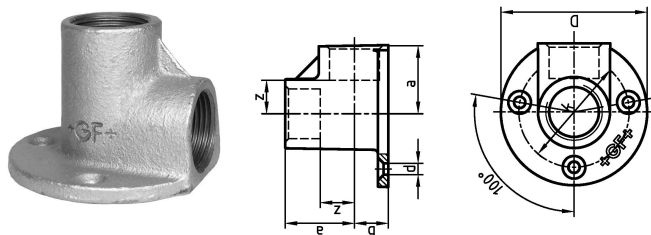

Status

Item Available From date

2025-09-05

Product code

Item no EAN	7611205452414
Item no GF	770471203
Item no GTIN	07611205452414
Item no RSK	1306129
Item no VVS	004471403

Dimensions

Item Unit Height	60
Item Unit Length	60
Item Unit Weight	0,152
Item Unit Width	37
Item_UOM	pce

Packaging

Packaging GTIN PL1	07611205652418
Packaging GTIN PL2	07611205252410
Packaging GTIN PL4	06414900239431
Packaging Height PL1	60
Packaging Height PL2	100
Packaging Height PL4	508
Packaging Length PL1	180
Packaging Length PL2	260
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL2	30
Packaging Quantity PL4	2160
Packaging Type PL1	Plastic_Bag

Packaging Type PL2	Medium_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,005724
Packaging Volume PL2	0,00494
Packaging Volume PL4	0,48768
Packaging Weight PL1	1,53
Packaging Weight PL2	4,69
Packaging Weight PL4	362,68
Packaging Width PL1	530
Packaging Width PL2	190
Packaging Width PL4	800

Measurements

Z Measurement a	25
Z Measurement a	25
Z Measurement b	12
Z Measurement d	60
Z Measurement k	41,5
Z	15

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
 WD18 8GA, Watford
 UK

T +44 (0)1923 381212
 E
 customerservice.uk.bfs@georgfi
 scher.com