

PEX rails

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	Plastic
Subcomponent Material	Polyethylene (post-consumer products)

Product information and application use

Plastic PEX Rail secures Uponor PEX tubing products to metal, concrete and wood support structures. Note: Suitable fastening hardware is required (not included).

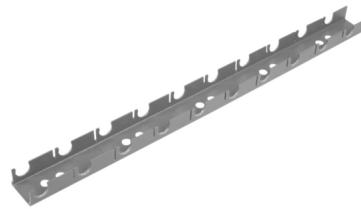

Part name	Part no.	Weight per UOM [lbs/UOM]
1/2" PEX Rail, 6.5 ft.	A5700500	1.1
5/8" PEX Rail, 6.5 ft.	A5700625	1
3/4" PEX Rail, 6.5 ft.	A5700750	1.35

Installation

Lay out the tube rails parallel with the floor joists (perpendicular to the tubing layout direction). Space the rails 12 inches from the edge of the wall and 36 inches on center thereafter. Fasten the rails to the subfloor using 1" wood screws, liquid nails or silicone. Refer to the Uponor Radiant Installation Handbook for additional information.

Related applications

Radiant Heating and Cooling Systems
Turf Conditioning Systems
Permafrost Prevention Systems
Snow and Ice Melt Systems

Footnotes

-

Contact information

Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
-----------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------