
# Commercial EP branch multi-port elbows

## Project information

| | |
|---|---|
| Job name: | Location: |
| Engineer: | Date submitted: |
| Contractor: | Submitted by: |
| Manufacturer's representative: | Approved by: |

## Technical data

| | |
|---|---|
| Material | Engineered Polymer |
| End type 2 | ProPEX 1/2" |
| Temp/pressure ratings | 73 °F (23 °C) at 160 psi (11 bar) |
| | 180 °F (82 °C) at 100 psi (6.9 bar) |
| | 200 °F (93 °C) at 80 psi (5.5 bar) |

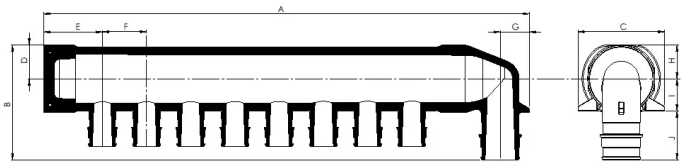


## Product information and application use

Engineered polymer (EP) branch multi-port elbows feature an integrated ¾" or 1" ProPEX® inlet with ½" ProPEX branch outlets. The elbows are designed for commercial plumbing applications to eliminate the need for multiple connections. Product includes EP Mounting Clips (F7051250) with Phillips self-tapping screws.

Note: Temperature and pressure ratings stated are hydrostatic ratings. For domestic hot-water (DHW) and DHW recirculation installations, operating conditions should not exceed 140°F (60°C) at 80 psi (5.5 bar) in accordance with ASTM F2023. For additional information regarding application-specific temperature and pressure ratings, refer to the Uponor PEX Piping Systems Design and Installation Manual.

| | Part name | Part no. | A [inch] | B [inch] | C [inch] | D [inch] | E [inch] | F [inch] | G [inch] | H [inch] | I [inch] | J [inch] |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ✔ | 3/4" EP Branch Multi-port Elbow, 8 (1/2") outlets with mounting clips | Q2087550 | 9.89 | 2.325 | 1.768 | 0.685 | 1.2 | 0.9 | 0.59 | 0.685 | 0.65 | 0.719 |
| | 1" EP Branch Multi-port Elbow, 10 (1/2") outlets with mounting clips | Q2101000 | 11.75 | 2.561 | 1.768 | 0.685 | 1.2 | 0.9 | 0.75 | 0.685 | 0.65 | 0.719 |

| | Part name | Part no. | End Type 1 | Weight per UOM [lbs/UOM] |
|---|---|---|---|---|
| ✔ | 3/4" EP Branch Multi-port Elbow, 8 (1/2") outlets with mounting clips | Q2087550 | ProPEX 3/4" | 0.39 |
| | 1" EP Branch Multi-port Elbow, 10 (1/2") outlets with mounting clips | Q2101000 | ProPEX 1" | 0.47 |

| Part name | Part no. | Codes | Standards | Listings |
|---|---|---|---|---|
| Commercial EP branch multi-port elbows | All | UPC\|IMC\|IPC\|IBC\|IRC\|UMC\|NSPC\|NPC of Canada | ASTM E119/UL 263\|ASTM F1960\|ASTM E814/ULC S115\|CSA B137.5\|NSF/ANSI 14\|NSF/ANSI/CAN 61\|ASTM F877\|ULC S102.2\|ULC S101 | cNSFus-pw\|IAPMO-ES\|ICC-ES-PMG\|cQAIus P321\|UL\|U.P.Code\|HUD MR 1269 |

## Installation

The mounting clips feature self-tapping screws, which are appropriate for wood or metal studs. Simply attach the clips to the multi-port and fasten the clips to the mounting surface.

## Related applications

PEX-a Plumbing Systems

## Footnotes

-

## Contact information


Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517


© 2026 Uponor North America. All Rights Reserved