

Uponor PP-RCT cold potable pipes, SDR 11

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	PP-RCT
Temp/pressure ratings	73 °F (23 °C) at 252 psi (17.4 bar) 120 °F (49 °C) at 140 psi (9.7 bar) 180 °F (82 °C) at 85 psi (5.9 bar)
Prop 65 label required?	No

Product information and application use

Use Uponor PP-RCT cold potable pipe to convey water for cold potable plumbing applications as well as other lower-pressure, lower-temperature applications.

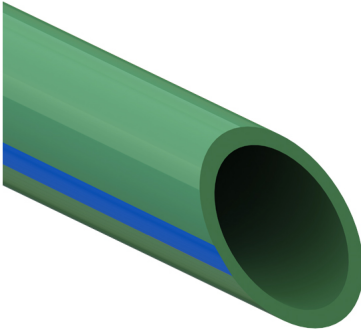

Part name	Part no.	R value
1" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221310	-
1 1/4" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221313	-
1 1/2" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221315	-
2" Uponor PP-RCT Cold Potable Pipe, SDR 11, 13-ft. straight length	PR11221320	-
2 1/2" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221925	-
3" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221930	-
4" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221940	-
6" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221960	-
8" Uponor PP-RCT Cold Potable Pipe, SDR 11, 19-ft. straight length	PR11221980	-

Part name	Part no.	Codes	Standards	Listings
Uponor PP-RCT cold potable pipes, SDR 11	All	UPC IRC IPC NPC of Canada UMC CMC CPC IMC	NSF/ANSI/CAN 61 ASTM E84 NSF/ANSI 51 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

InstallationRelated applications

Use approved butt-fusion or socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.

Footnotes

	Uponor Inc.	Uponor Ltd.
	5925 148th Street West	6510 Kennedy Road
-	Apple Valley, MN 55124	Mississauga, ON L5T 2X4
	T 800.321.4739	T 888.594.7726
	F 952.891.2008	F 800.638.9517