

Uponor ProPEX® lead-free (LF) brass adapters

Project information


Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	PP-RCT
Temp/pressure ratings	73 °F (23 °C) at 340 psi (23.44 bar) 140 °F (60 °C) at 190 psi (13.1 bar) 180 °F (82 °C) at 100 psi (6.9 bar)
Prop 65 label required?	Yes

Product information and application use

Use Uponor ProPEX lead-free (LF) brass adapters with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications.

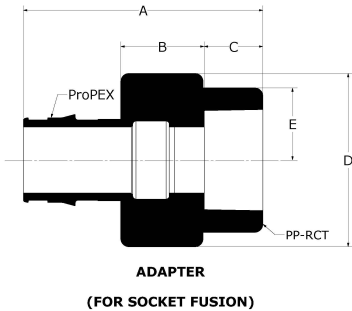

Part name	Part no.	End Type 1	End Type 2
Uponor ProPEX LF Brass Adapter, 1" PP-RCT x 1" PEX	PR4511010	Socket 1"	ProPEX 1"
Uponor ProPEX LF Brass Adapter, 1/2" PP-RCT x 1/2" PEX	PR4515050	Socket 1/2"	ProPEX 1/2"
Uponor ProPEX LF Brass Adapter, 3/4" PP-RCT x 3/4" PEX	PR4517575	Socket 3/4"	ProPEX 3/4"

Part name	Part no.	Codes	Standards	Listings
Uponor ProPEX® lead-free (LF) brass adapters	All	CMC IMC UMC	ASTM F1960 ASTM E84 NSF-14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

Installation	Related applications
For the PEX side, use the appropriate ProPEX ring and fitting. For the PP-RCT side, use approved socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.	Hydronic heating and cooling systems Industrial

Footnotes	Contact information
-	<div>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</div> <div>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</div>