


Uponor PP-RCT mechanical pipes, SDR 7.4 with fiber

Project Information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	PP-RCT
Temp/pressure ratings	73 °F (23 °C) at 335 psi (23 bar) 120 °F (49 °C) at 221 psi (15.2 bar) 180 °F (82 °C) at 100 psi (6.9 bar)
Prop 65 label required?	No

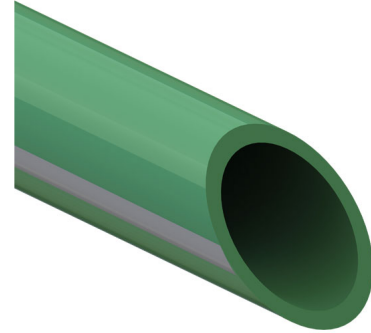

Product information and application use

Use Uponor PP-RCT mechanical pipe to convey fluid for hydronic heating and cooling or industrial applications. The pipe contains a fiber layer coextruded into the mid-wall of the pipe to reduce expansion/contraction with temperature changes.

Part name	Part no.	R value
1/2" Uponor PP-RCT Mechanical Pipe, SDR 7.4 with Fiber, 13-ft. straight length	PR7231350	0.08
3/4" Uponor PP-RCT Mechanical Pipe, SDR 7.4 with Fiber, 13-ft. straight length	PR7231375	0.1

Part name	Part no.	Codes	Standards	Listings
Uponor PP-RCT mechanical pipes, SDR 7.4 with fiber	All	CMC IMC UMC	ASTM E84 NSF/ANSI 14 ASTM F2389 CSA B137.11	ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775

Installation	Related applications
Use approved butt-fusion or socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details.	Hydronic heating and cooling systems Industrial

Footnotes	Contact information		
-	<table border="0"> <tr> <td>Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008</td> <td>Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517</td> </tr> </table>	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517		