

ChlorFIT Caps

Project information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:


Technical data

Material CPVC

Product information and application use

Use Uponor ChlorFIT® Schedule 80 Corzan® CPVC Caps in hot and cold potable-water systems as well as hydronic heating and cooling applications.

Corzan® is a registered trademark of Lubrizol Advanced Materials, Inc.

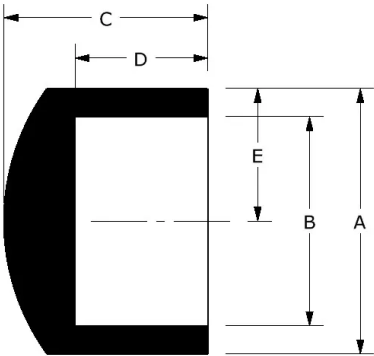

Part name	Part no.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	End Type 1	Weight per UOM [kg/UOM]
1/2" CPVC80 Cap (S)	9847005	32.89	21.34	32.73	22.40	16.45	CPVC 1/2"	0.0251
3/4" CPVC80 Cap (S)	9847007	37.21	26.67	37.06	25.60	18.61	CPVC 3/4"	0.0322
1" CPVC80 Cap (S)	9847010	46.36	33.40	42.42	28.78	23.18	CPVC 1"	0.055
1 1/4" CPVC80 Cap (S)	9847012	56.26	42.16	47.75	31.95	28.13	CPVC 1-1/4"	0.0865
1 1/2" CPVC80 Cap (S)	9847015	66.04	48.26	53.01	35.13	33.02	CPVC 1-1/2"	0.1311
2" CPVC80 Cap (S)	9847020	76.58	60.33	58.86	38.33	38.29	CPVC 2"	0.1695
2-1/2" CPVC80 Cap (S)	9847025	87.58	73.03	69.24	45.09	43.79	CPVC 2-1/2"	0.2922
3" CPVC80 Cap (S)	9847030	105.21	88.90	77.49	48.26	52.61	CPVC 3"	0.3772
4" CPVC80 Cap (S)	9847040	132.08	114.30	93.31	59.13	66.04	CPVC 4"	0.7093
6" CPVC80 Cap (S)	9847060	192.02	168.28	125.28	77.22	96.01	CPVC 6"	1.3668
8" CPVC80 Cap (S)	9847080	247.40	219.08	160.05	102.11	123.70	CPVC 8"	2.8214

Part name	Part no.	Codes	Standards	Listings
ChlorFIT Caps	All	UPC IBC IRC IPC UMC NSPC IMC	ASTM F439 NSF/ANSI/CAN 61 NSF/ANSI 14	ULC NSFpw-G U.P.Code
In addition, the following parts have additional codes, standards, or listings:				
1/2" CPVC80 Cap (S)	9847005			ICC-ES-PMG
3/4" CPVC80 Cap (S)	9847007			ICC-ES-PMG
1" CPVC80 Cap (S)	9847010			ICC-ES-PMG
1 1/4" CPVC80 Cap (S)	9847012			ICC-ES-PMG
1 1/2" CPVC80 Cap (S)	9847015			ICC-ES-PMG
2" CPVC80 Cap (S)	9847020			ICC-ES-PMG
2-1/2" CPVC80 Cap (S)	9847025			ICC-ES-PMG
3" CPVC80 Cap (S)	9847030			ICC-ES-PMG
4" CPVC80 Cap (S)	9847040			ICC-ES-PMG
6" CPVC80 Cap (S)	9847060			ICC-ES-PMG

Installation	Related applications
Make connections via solvent welding using primer and solvent cement designed specifically for Schedule 80 CPVC pipe and fittings. Refer to the Uponor ChlorFIT Manual or Uponor ChlorFIT Solvent Welding Instruction Sheet for complete details.	Domestic water Hydronic piping

Footnotes	Contact information
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517