

Uniones de bronce de PP-RCT de Uponor (fusión de toma)

Project information


|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Fecha de envío: |
| Contractor:                    | Presentada por: |
| Manufacturer's representative: | Approved by:    |

Technical data

|                       |                                      |
|-----------------------|--------------------------------------|
| Material              | PP-RCT                               |
| Temp/pressure ratings | 73 °F (23 °C) at 340 psi (23.44 bar) |
|                       | 140 °F (60 °C) at 190 psi (13.1 bar) |
|                       | 180 °F (82 °C) at 100 psi (6.9 bar)  |

Product information and application use

Use Uponor PP-RCT brass unions with Uponor PP-RCT mechanical pipe to convey water for hydronic heating and cooling or industrial applications.

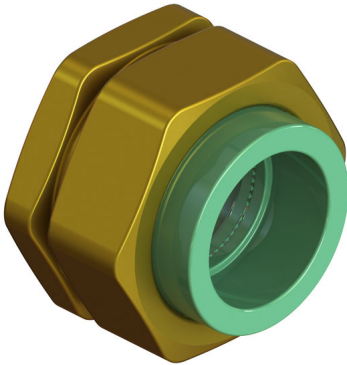

| Part name                        | Part no.  | End Type 1    | End Type 2    | Prop 65 label required? |
|----------------------------------|-----------|---------------|---------------|-------------------------|
| Uponor PP-RCT Brass Union, 1/2   | PR4720500 | Socket 1/2"   | Socket 1/2"   | Yes                     |
| Uponor PP-RCT Brass Union, 3/4   | PR4720750 | Socket 3/4"   | Socket 3/4"   | Yes                     |
| Uponor PP-RCT Brass Union, 1     | PR4721000 | Socket 1"     | Socket 1"     | Yes                     |
| Uponor PP-RCT Brass Union, 1 1/4 | PR4721250 | Socket 1-1/4" | Socket 1-1/4" | Yes                     |
| Uponor PP-RCT Brass Union, 1 1/2 | PR4721500 | Socket 1-1/2" | Socket 1-1/2" | Yes                     |
| Uponor PP-RCT Brass Union, 2     | PR4722000 | Socket 2"     | Socket 2"     | No                      |

| Part name                                              | Part no. | Codes       | Standards                              | Listings                                                |
|--------------------------------------------------------|----------|-------------|----------------------------------------|---------------------------------------------------------|
| Uniones de bronce de PP-RCT de Uponor (fusión de toma) | All      | CMC IMC UMC | ASTM E84 NSF-14 ASTM F2389 CSA B137.11 | ICC-ES-PMG 1106 IAPMO-R&T 8358 QAI P321-5 IAPMO K-12775 |

| Installation                                                                                           | Related applications                               |
|--------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Use approved socket-fusion connection methods. Refer to the Uponor PP-RCT manual for complete details. | Hydronic heating and cooling systems<br>Industrial |

| Footnotes | Contact information                                                                                                                                                                                                               |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -         | <div>Uponor Inc.<br/>5925 148th Street West<br/>Apple Valley, MN 55124<br/>T 800.321.4739<br/>F 952.891.2008</div> <div>Uponor Ltd.<br/>6510 Kennedy Road<br/>Mississauga, ON L5T 2X4<br/>T 888.594.7726<br/>F 800.638.9517</div> |