Válvula de bola de transición de latón sin plomo (LF)
ProPEX - MNPT

Project information


Job name:	Location:
Engineer:	Fecha de envío:
Contractor:	Presentada por:
Manufacturer's representative:	Approved by:

Technical data

Material	LF Brass
Cold working pressure	250 psi
Temp/pressure ratings	200 °F (93 °C) at 200 psi (13.8 bar)
Prop 65 label required?	Yes

Product information and application use

Estas válvulas de bola de puerto completo con vástagos de acero inoxidable proporcionan un rendimiento confiable y de alto flujo y permiten a los contratistas acelerar las instalaciones en espacios reducidos para una mayor productividad en el lugar de trabajo, al tiempo que ofrecen a los ingenieros oportunidades óptimas de diseño híbrido para cumplir con los requisitos de presión, temperatura y espacio

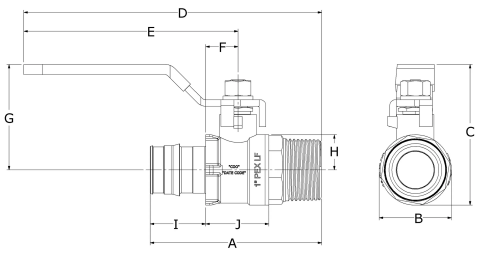

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	J [inch]
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1/2" PEX x 1/2" MNPT	LFT4915050SS	2.524	1.001	2.03	4.776	3.425	0.465	1.583	0.447	0.709	1.012
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" MNPT	LFT4917575SS	2.992	1.28	2.411	4.949	3.425	0.524	1.791	0.62	0.945	1.122
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" MNPT	LFT4911010SS	3.579	1.535	2.984	6.26	4.547	0.685	2.236	0.748	1.181	1.339
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" MNPT	LFT4911313SS	4.142	1.858	3.311	6.423	4.547	0.821	2.396	0.915	1.445	1.575
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/2" PEX x 1 1/2" MNPT	LFT4911515SS	4.626	2.126	4.134	7.579	5.638	0.98	3.091	1.043	1.705	1.799
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2" PEX x 2" MNPT	LFT4912020SS	5.492	2.874	4.78	7.862	5.638	1.122	3.362	1.417	2.146	2.138

Part name	Part no.	Cv	End Type 1	End Type 2	Weight per UOM [lbs/UOM]
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1/2" PEX x 1/2" MNPT	LFT4915050SS	5	ProPEX 1/2"	MNPT 1/2"	0.33
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" MNPT	LFT4917575SS	14.4	ProPEX 3/4"	MNPT 3/4"	0.5
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1" PEX x 1" MNPT	LFT4911010SS	17	ProPEX 1"	MNPT 1"	0.87
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" MNPT	LFT4911313SS	26.9	ProPEX 1-1/4"	MNPT 1-1/4"	1.34
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/2" PEX x 1 1/2" MNPT	LFT4911515SS	36.6	ProPEX 1-1/2"	MNPT 1-1/2"	1.94
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2" PEX x 2" MNPT	LFT4912020SS	82.1	ProPEX 2"	MNPT 2"	3.04

© 2026 Uponor North America. All Rights Reserved

Part name	Part no.	Codes	Standards	Listings
Válvula de bola de transición de latón sin plomo (LF) ProPEX - MNPT	All	UPC|IBC|IRC|IPC|NPC of Canada|UMC|IMC	NSF/ANSI/CAN 372|ASTM F877|NSF/ANSI 359|ASTM F1960|CSA B137.5|NSF/ANSI/CAN 61|NSF/ANSI 14	cNSFus-pw-G|U.P.Code
In addition, the following parts have additional codes, standards, or listings:				
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 3/4" PEX x 3/4" MNPT	LFT4917575SS			
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/4" PEX x 1 1/4" MNPT	LFT4911313SS			
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 1 1/2" PEX x 1 1/2" MNPT	LFT4911515SS			
ProPEX LF Brass Transition Ball Valve (full port) SS Ball and Stem 2" PEX x 2" MNPT	LFT4912020SS			

Installation	Related applications
Utilice las válvulas de bola de transición de latón ProPEX LF para conexiones roscadas, prensadas y bridas en aplicaciones de tuberías mecánicas y de agua doméstica y HVAC.	-

Footnotes	Contact information	
-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517

© 2026 Uponor North America. All Rights Reserved