


Collecteurs de chauffage en EP

Renseignements sur le projet

Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Engineered Polymer
Loop Cv	1.4 Cv
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 3/4"
Temp/pressure ratings	140 °F (60 °C) at 87 psi (6 bar) 158 °F (70 °C) at 72 psi (5 bar) 176 °F (80 °C) at 58 psi (4 bar) 194 °F (90 °C) at 44 psi (3 bar)
Max. fluid flow rate	15.4 gpm
Prop 65 label required?	Yes

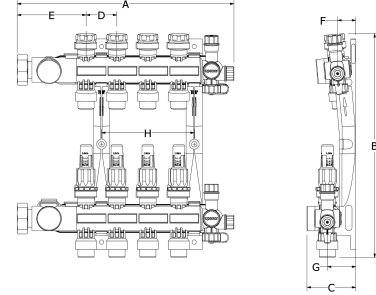

Informations sur le produit et utilisation de l'application

The Engineered Polymer (EP) Heating Manifold Assemblies feature isolation valves and balancing valves with flow meters (0-1 gpm), and come fully assembled, ready for installation in hydronic radiant heating and cooling systems. Use only propylene glycol in radiant systems with EP Heating Manifolds; never use ethylene glycol.

Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	Weight per UOM [lbs/UOM]
EP Heating Manifold Assembly with Flow Meter, 2-loop	A2670201	9.88	14.184	3.11	1.969	4.39	1.181	1.811	-	-	3.5
EP Heating Manifold Assembly with Flow Meter, 3-loop	A2670301	11.849	14.184	3.11	1.969	4.39	1.181	1.811	3.937	-	4.16
EP Heating Manifold Assembly with Flow Meter, 4-loop	A2670401	13.817	14.184	3.11	1.969	4.39	1.181	1.811	5.906	-	4.82
EP Heating Manifold Assembly with Flow Meter, 5-loop	A2670501	15.786	14.184	3.11	1.969	4.39	1.181	1.811	7.874	-	5.48
EP Heating Manifold Assembly with Flow Meter, 6-loop	A2670601	17.754	14.184	3.11	1.969	4.39	1.181	1.811	9.843	-	6.14
EP Heating Manifold Assembly with Flow Meter, 7-loop	A2670701	19.723	14.184	3.11	1.969	4.39	1.181	1.811	11.813	-	6.8
EP Heating Manifold Assembly with Flow Meter, 8-loop	A2670801	21.691	14.184	3.11	1.969	4.39	1.181	1.811	13.78	-	7.46

L'installation

Do not use thread sealant on connections. Carriers present in these compounds can crack the plastic port connections, resulting in leaks and water damage. For additional information, refer to the EP Heating Manifold Instruction Sheet. Note: Use only propylene glycol in radiant heating and cooling systems with EP Heating Manifolds; never use ethylene glycol. Refer to the EP Heating Manifold Installation Guide for a complete chemicals list.

Applications connexes

Radiant Heating and Cooling Systems
Permafrost Protection Systems
Turf Conditioning Systems

Les codes

Normes

Annonces

Remarques :

Compatible Actuators:

A3023522 Thermal Actuator, four-wire; A3030522 Two-wire Thermal Actuator for EP Heating Manifolds

Notes de bas de page

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517