Supports de cintrage en plastique à 90 degrés

Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

Données techniques

Material	Plastic
Subcomponent Material	Glass-reinforced nylon

Informations sur le produit et utilisation de l'application

Plastic Bend Support (glass-reinforced nylon) provides rigid 90-degree bend and sleeve for ⅜", ½" and ¾" Uponor PEX tubing.

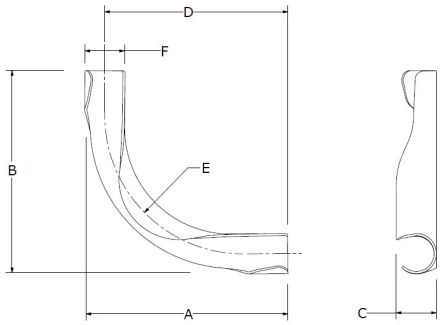

	Nom de la pièce	Numéro de pièce	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	Weight per UOM [lbs/UOM]
✔	3/8" Plastic Bend Support	A5150375	3.866	4.071	1.025	3.448	2.475	1.025	0.05
	1/2" Plastic Bend Support	A5250500	3.644	3.646	0.927	3.125	2.385	1.04	0.05
	3/4" Plastic Bend Support	A5150750	6.109	6.11	1.225	5.517	3.84	1.185	0.15

L'installation

Snap the tubing into the bend support at the beginning of the bend. Continue the bend through the support and snap the tubing into the support at the end of the bend as well. Refer to the Uponor PEX Piping Design Systems and Installation Manual for additional information.

Applications connexes

PEX-a Plumbing Systems

AquaSAFE™ Fire Safety Systems

Hydronic Distribution Systems

Radiant Heating and Cooling Systems

Notes de bas de page

-

Coordonnées de la personne-ressource

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517

© 2026 Uponor Amérique du Nord. Tous droits réservés