

# Rails en PEX

## Renseignements sur le projet

Nom du poste :

Lieu :

Ingénieur :

Date de  
soumission:

Entrepreneur :

Présentée par:

Représentant du fabricant :


Approuvé par :

## Données techniques

Material Plastic  
Subcomponent Material Polyethylene (post-consumer products)

## Informations sur le produit et utilisation de l'application

Plastic PEX Rail secures Uponor PEX tubing products to metal, concrete and wood support structures. Note: Suitable fastening hardware is required (not included).

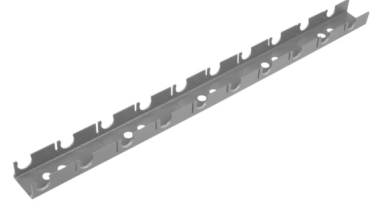

Nom de la pièce	Numéro de pièce	Weight per UOM [lbs/UOM]
1/2" PEX Rail, 6.5 ft.	A5700500	1.1
5/8" PEX Rail, 6.5 ft.	A5700625	1
3/4" PEX Rail, 6.5 ft.	A5700750	1.35

## L'installation

Lay out the tube rails parallel with the floor joists (perpendicular to the tubing layout direction). Space the rails 12 inches from the edge of the wall and 36 inches on center thereafter. Fasten the rails to the subfloor using 1" wood screws, liquid nails or silicone. Refer to the Uponor Radiant Installation Handbook for additional information.

## Applications connexes

Radiant Heating and Cooling Systems  
Turf Conditioning Systems  
Permafrost Prevention Systems  
Snow and Ice Melt Systems

## Notes de bas de page

## Coordonnées de la personne-ressource

Uponor Inc.  
5925 148th Street West  
Apple Valley, MN 55124  
T 800.321.4739  
F 952.891.2008

Uponor Ltd.  
6510 Kennedy Road  
Mississauga, ON L5T 2X4  
T 888.594.7726  
F 800.638.9517