

# Raccords unions de décalage pour collecteur TruFLOW Classic



## Renseignements sur le projet


Nom du poste :	Lieu :
Ingénieur :	Date de soumission:
Entrepreneur :	Présentée par:
Représentant du fabricant :	Approuvé par :

## Données techniques

Material	Brass
End type 1	ISO 228-G 1-1/4"
End type 2	ISO 228-G 1-1/4"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar) 180 °F (82 °C) at 100 psi (6.9 bar) 200 °F (93 °C) at 80 psi (5.5 bar)
Prop 65 label required?	Yes

## Informations sur le produit et utilisation de l'application

TruFLOW™ classic manifold offset unions feature an R32 union by 1 1/4" BSP male connection for easy alignment of the supply and return piping at the manifold.

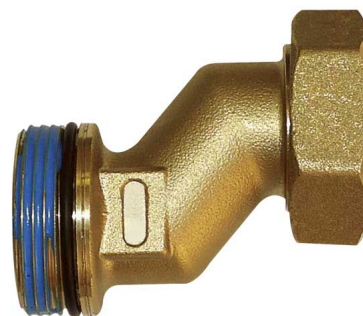

Nom de la pièce	Numéro de pièce	A [Inch]	B [Inch]	C [Inch]	Weight per UOM [lbs/UOM]
TruFLOW Classic Manifold Offset Union, R32 Union x 1 1/4" BSP	A2620045	3.302	2.047	1.811	0.6

## L'installation

Use the TruFLOW Classic Manifold Offset Union to make the connection between TruFLOW manifolds and R32 manifold adapters. Remove the existing straight union assembly from the manifold to install this offset union. Use silicone oil on the male threads to ease installation. Use only the following Uponor TruFLOW manifold accessories: Replacement O-ring for 1 1/4" BSP Connections (A2620008) and Replacement Gasket for R32 Union Connections (A2620005). For more information, refer to the Uponor TruFLOW Classic Manifold Instruction Sheet.

## Applications connexes

Radiant Heating and Cooling Systems

Les codes	Normes	Annonces
-	R32:	-

## Remarques :

Connection:  
1 1/4" male BSP x R32

## Notes de bas de page

## Coordonnées de la personne-ressource

-	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008	Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.638.9517
---	---	---