

Plumbing

uponor

# Product Catalogue 2024



# Table of contents

## Flexible Pipe Systems

### PEX Pipes

Aqua Pipe	PE-Xa pipe for tap water installation .....	4
-----------	---	---

### Fittings

Q&E	Q&E Fittings for modular pipes.....	6
-----	-------------------------------------	---

## Flexible Pipe Systems Tools and Accessories

Q&E Expansion Tools	Tools for Plumbing and Indoor Climate pipes .....	18
Pipe Cutting Tools	Tools for Plumbing and Indoor Climate pipes .....	19
Accessories	.....	20

## Multilayer Pipe Systems

### Pipes

Uni Pipe plus and MLCP pipes	Multilayer composite pipe overlapped welded .....	22
------------------------------	---	----

### Fittings

S-Press PLUS	Press fittings with safety-test feature and colour code .....	25
--------------	---	----

## Riser System

### Fittings

RS Fittings	Modular fittings for bigger dimensions .....	46
-------------	--	----

## Multilayer Pipe Systems Tools and Accessories


Cutting & Preparation	Tools for Plumbing and Indoor Climate pipes .....	52
Pressing	Tools for Plumbing and Indoor Climate pipes .....	55
Accessories	.....	61



## Flexible Pipe Systems



# Uponor Aqua Pipe



Uponor Aqua Pipe is manufactured from highest quality cross-linked polyethylene and is designed for tap water application as well as distribution pipes.

## Your benefits

- Certified quality
- Corrosion resistant
- Thermal memory
- Lightweight and very flexible
- Durable



## Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

## Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage


## Certification

- WaterMark Certified to AS/NZS 2537.2:2011 Mechanical jointing fittings for use with crosslinked polyethylene (PE-X) for pressure applications Part 2: Plastics piping systems for hot and cold-water installations– Crosslinked polyethylene (PE-X)– Fittings (ISO 15875-3:2003, MOD).
- AS 2492:2007 Cross-Linked polyethylene (PE-X) for pressure applications.




## Uponor Aqua Pipe opaque PN20

- Coils



Item no.	Dimension	L m	do mm	s mm	p mm	colour	Qty 2	Qty 1	UOM
<b>1126786</b>	16x2,2	100m	100	16	2,2	10 white	1100	100	m
<b>1126787</b>	20x2,8	100m	100	20	2,8	10 white	550	100	m
<b>1126788</b>	25x3,5	100m	100	25	3,5	10 white	400	100	m

## Uponor Aqua Pipe natural in conduit black



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	p mm	colour	Qty 2	Qty 1	UOM
<b>1008993</b>	16x2,2 25/20	50m	50	20	16	25	2,2	10 black	550	50	m
<b>1008994</b>	20x2,8 28/23	50m	50	23	20	28	2,8	10 black	400	50	m

# Uponor Aqua Pipe

## Uponor Aqua pipes insulated, coils, PN20


### Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene
- Insulation made of expanded grey closed cell PE-foam with external protective film of extruded polyethylene-LD, CFC free, fire resistance class B1 acc. to DIN EN 13501-1
- Thermal conductivity  $\lambda = 0.040$  W/mK, permeability = <1%, diffusion of water vapor 10000  $\mu$ .

### Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage

## Uponor Aqua pipes insulated, coils, PN20



Item no.	Dimension	L m	do mm	do1 mm	s1 mm	p bar	colour	Qty 2	Qty 1	UOM
<b>1020240</b>	20x2,8 41x9 50m	50	20	41	2,8	10	grey	450	50	m

# Uponor Q&E



Uponor Q&E is a unique and innovative fittings system that uses the shrink-back effect of cross-linked polyethylene PE-Xa pipes for quick and easy installation. A wide range of fittings and accessories makes Q&E a

complete and secure system for cost-effective installation. Corrosion resistance makes it safe, secure and watertight.

## Your benefits

- Elasticity of PE-Xa pipes for high safety
- Corrosion resistant
- Low pressure loss
- Ergonomic design of ring
- Easy identification of ring dimension



## Specification

- Q&E fittings and rings for Uponor Pex pipes
- Metal fittings are made of high quality brass
- Plastic fittings are made of polyphenylsulphone
- Q&E rings must be ordered separately if not different mentioned

## Application

if not different mentioned:

- Male and female threads acc.to EN 10226-1.
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage.

## Certification

- WaterMark Certified to AS/NZS 2537.2:2011 Mechanical jointing fittings for use with crosslinked polyethylene (PE-X) for pressure applications Part 2: Plastics piping systems for hot and cold-water installations– Crosslinked polyethylene (PE-X)– Fittings (ISO 15875-3:2003, MOD).
- AS 2492:2007 Cross-Linked polyethylene (PE-X) for pressure applications.




## Uponor Q&E evolution ring

- Conical inner shape
- With stop edge
- PE material



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1057453	16	16	16,2	25,3	1	10	white	900	20	pce
1057454	20	20	20,2	29,2	1	10	white	520	20	pce
1057455	25	25	25,3	34,6	1	10	white	300	20	pce




Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1058010	16	16	16,2	25,3	1	10	red	900	20	pce
1058011	20	20	20,2	29,2	1	10	red	520	20	pce
1058012	25	25	25,3	34,6	1	10	red	300	20	pce



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
1058013	16	16	16,2	25,3	1	10	blue	900	20	pce
1058014	20	20	20,2	29,2	1	10	blue	520	20	pce
1058015	25	25	25,3	34,6	1	10	blue	300	20	pce


# Uponor Q&E

## Uponor Q&E adapter male thread PPSU




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1008661</b>	16-G $\frac{1}{2}$ "MI	42	16	18	$\frac{1}{2}$	8	10	90	5	pce
<b>1008662</b>	20-G $\frac{1}{2}$ "MI	46	16	22	$\frac{1}{2}$	8	10	80	5	pce
<b>1008663</b>	20-G $\frac{3}{4}$ "MI	48	18	22	$\frac{3}{4}$	8	10	60	5	pce
<b>1008664</b>	25-G $\frac{3}{4}$ "MI	54	18	28	$\frac{3}{4}$	8	10	50	5	pce
<b>1008665</b>	25-G1"MI	58	23	28	1	8	10	40	5	pce

## Uponor Q&E adapter female thread PPSU




Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1042329</b>	16-Rp $\frac{1}{2}$ "FI	42	17	18	$\frac{1}{2}$	7	10	80	5	pce
<b>1042330</b>	20-Rp $\frac{1}{2}$ "FI	45	17	22	$\frac{1}{2}$	6	10	60	5	pce
<b>1042331</b>	20-Rp $\frac{3}{4}$ "FI	47	18	22	$\frac{3}{4}$	7	10	50	5	pce
<b>1042332</b>	25-Rp $\frac{3}{4}$ "FI	52	18	28	$\frac{3}{4}$	6	10	40	5	pce

## Uponor Q&E adapter swivel nut PPSU




Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1038021</b>	16-G $\frac{1}{2}$ "SN	35	8	18	$\frac{1}{2}$	9	10	50	1	pce
<b>1038022</b>	20-G $\frac{1}{2}$ "SN	47	9	22	$\frac{1}{2}$	16	10	40	1	pce
<b>1038023</b>	20-G $\frac{3}{4}$ "SN	39	8	22	$\frac{3}{4}$	9	10	30	1	pce
<b>1038024</b>	25-G $\frac{3}{4}$ "SN	53	8	28	$\frac{3}{4}$	17	10	25	1	pce
<b>1038025</b>	25-G1"SN	46	10	27	1	9	10	25	1	pce

## Uponor Q&E coupling PPSU



Item no.	Dimension	l	l1	l2	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	bar			
<b>1008669</b>	16-16	39	18	18	3	10	100	5	pce
<b>1008932</b>	20-20	47	22	22	3	10	80	5	pce
<b>1008671</b>	25-25	58	28	28	3	10	50	5	pce


## Uponor Q&E reducer PPSU



Item no.	Dimension	l	l1	l2	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	bar			
<b>1008674</b>	20-16	43	22	18	3	10	100	5	pce
<b>1008675</b>	25-16	49	28	18	3	10	40	5	pce
<b>1008676</b>	25-20	53	22	28	3	10	40	5	pce


# Uponor Q&E

## Uponor Q&E elbow adapter male thread PPSU




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1008666</b>	16-G $\frac{1}{2}$ "MI	31	34	$\frac{1}{2}$	15	16	10	80	5	pce
<b>1008667</b>	20-G $\frac{1}{2}$ "MI	31	38	$\frac{1}{2}$	15	16	10	60	5	pce
<b>1008668</b>	25-G $\frac{3}{4}$ "MI	36	42	$\frac{3}{4}$	18	15	10	40	5	pce

## Uponor Q&E elbow adapter female thread PPSU




Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1042334</b>	16-Rp $\frac{1}{2}$ "FI	27	33	$\frac{1}{2}$	10	15	10	50	5	pce
<b>1042335</b>	20-Rp $\frac{1}{2}$ "FI	27	38	$\frac{1}{2}$	9	16	10	50	5	pce
<b>1042336</b>	20-Rp $\frac{3}{4}$ "FI	30	41	$\frac{3}{4}$	12	19	10	40	5	pce
<b>1042337</b>	25-Rp $\frac{3}{4}$ "FI	32	47	$\frac{3}{4}$	14	19	10	35	5	pce

## Uponor Smart Aqua tap elbow Q&E PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
<b>1042342</b>	16-Rp $\frac{1}{2}$ " l=43mm	34	17	27	$\frac{1}{2}$	16	10	36	10	40	5	pce
<b>1042343</b>	20-Rp $\frac{1}{2}$ " l=43mm	38	17	27	$\frac{1}{2}$	16	10	36	10	30	5	pce

## Uponor Smart Aqua tap elbow long Q&E PPSU




Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
<b>1042344</b>	16-Rp $\frac{1}{2}$ " l=49mm	34	165	33	$\frac{1}{2}$	16	16	36	10	35	5	pce




# Uponor Q&E

## Uponor Q&E elbow adapter swivel nut PPSU




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1038037</b>	16-G $\frac{1}{2}$ "SN	36	27	$\frac{1}{2}$	28	9	10	40	1	pce
<b>1038038</b>	20-G $\frac{1}{2}$ "SN	38	31	$\frac{1}{2}$	30	10	10	35	1	pce
<b>1038039</b>	20-G $\frac{3}{4}$ "SN	38	34	$\frac{3}{4}$	29	12	10	25	1	pce

## Uponor Q&E elbow PPSU




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1008679</b>	16-16	27	32	9	13	10	100	5	pce
<b>1008680</b>	20-20	34	39	12	16	10	40	5	pce
<b>1008681</b>	25-25	42	47	14	19	10	25	5	pce

## Uponor Q&E tee adapter female thread PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
<b>1042338</b>	16-Rp $\frac{1}{2}$ "FI-16	33	28	33	$\frac{1}{2}$	15	10	15	10	50	5	pce
<b>1042339</b>	20-Rp $\frac{1}{2}$ "FI-20	38	27	38	$\frac{1}{2}$	16	10	16	10	40	5	pce
<b>1042340</b>	25-Rp $\frac{1}{2}$ "FI-25	43	30	43	$\frac{1}{2}$	15	13	15	10	25	5	pce
<b>1042341</b>	25-Rp $\frac{3}{4}$ "FI-25	47	31	47	$\frac{3}{4}$	19	13	19	10	25	5	pce


## Uponor Q&E tee PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
<b>1008684</b>	16-16-16	32	27	32	14	10	14	10	60	5	pce
<b>1008685</b>	20-20-20	39	34	39	17	12	17	10	30	5	pce
<b>1008686</b>	25-25-25	47	42	47	20	15	20	10	20	5	pce

# Uponor Q&E


## Uponor Q&E tee reducer PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
1008710	16-20-16	35	33	35	17	11	17	10	40	5	pce
1008700	20-16-16	36	29	32	14	11	14	10	40	5	pce
1008689	20-16-20	36	29	36	14	11	14	10	40	5	pce
1008697	20-20-16	36	34	32	14	12	14	10	40	5	pce
1008711	20-25-20	42	40	42	20	12	20	10	25	5	pce
1008702	25-16-16	41	32	32	14	14	14	10	25	5	pce
1008699	25-16-20	41	32	36	14	14	14	10	25	5	pce
1008690	25-16-25	41	32	41	14	14	14	10	25	5	pce
1008701	25-20-16	44	37	35	17	15	17	10	25	5	pce
1008703	25-20-20	44	37	39	17	15	17	10	25	5	pce
1008691	25-20-25	44	37	44	17	15	17	10	20	5	pce
1001420	25-25-20	47	42	42	20	15	20	10	20	5	pce


## Uponor Q&E manifold PPSU

- Main connection for Q&E 25 mm

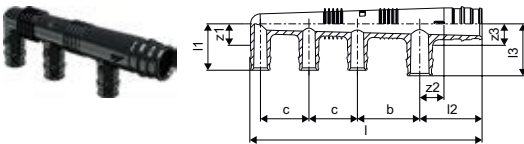

Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
1008718	25, 3X16 c/c45+35	3	133	34	45	34	16	18	16	45	35	10	15	1	pce
1008719	25 4X16 c/c45+2X35	4	168	34	45	34	16	18	16	45	35	10	15	1	pce

## Uponor Q&E manifold male thread PPSU

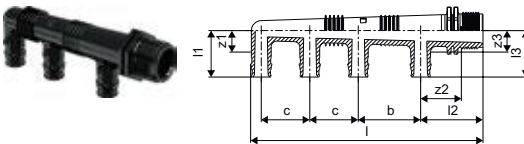

Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
1008714	G $\frac{3}{4}$ "MI 3X16 c/c45+35mm	3	133	34	45	34	16	29	16	45	35	10	10	1	pce
1008715	G $\frac{3}{4}$ "MI 4X16 c/c45+2X35mm	4	168	34	45	34	16	29	16	45	35	10	10	1	pce
1008716	G $\frac{3}{4}$ "MI 1X20+2X16 c/c45+35mm	3	133	34	45	38	16	29	16	45	35	10	10	1	pce
1008717	G $\frac{3}{4}$ "MI 1X20+3X16 c/c45+2X35mm	4	168	34	45	38	16	29	16	45	35	10	10	1	pce

# Uponor Q&E

## Uponor Q&E Lead-Free DR-brass coupling

### Specification

- Made of DR brass. Male thread acc.to DIN EN 10226-1 and AS2537.
- Q&E rings must be ordered separately if not different mentioned


### Application

- For tap water installations

if not different mentioned:


- Male and female threads acc.to EN 10226-1 and AS2537.

## Uponor Q&E DR Brass adapter male tapered thread LF




Item no.	Dimension	l	l1	l2	R	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1126814</b>	16-R $\frac{1}{2}$ "MT	41	12	18	$\frac{1}{2}$	12	10	100	5	pce
<b>1126815</b>	16-R $\frac{3}{4}$ "MT	43	13	18	$\frac{3}{4}$	12	10	80	5	pce
<b>1126816</b>	20-R $\frac{1}{2}$ "MT	45	12	22	$\frac{1}{2}$	12	10	100	5	pce
<b>1126817</b>	20-R $\frac{3}{4}$ "MT	47	13	22	$\frac{3}{4}$	12	10	70	5	pce
<b>1126818</b>	20-R1"MT	48	15	22	1	12	10	70	5	pce
<b>1126819</b>	25-R $\frac{3}{4}$ "MT	52	13	27	$\frac{3}{4}$	12	10	70	5	pce
<b>1126820</b>	25-R1"MT	53	15	27	1	12	10	40	5	pce

## Uponor Q&E DR Brass adapter female thread LF



Item no.	Dimension	l	l1	l2	Rp	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1126809</b>	16-Rp $\frac{1}{2}$ "FT	39	15	18	$\frac{1}{2}$	6	10	60	5	pce
<b>1126810</b>	20-Rp $\frac{1}{2}$ "FT	43	15	22	$\frac{1}{2}$	6	10	60	5	pce
<b>1126811</b>	20-Rp $\frac{3}{4}$ "FT	44	17	22	$\frac{3}{4}$	5	10	40	5	pce
<b>1126812</b>	20-Rp1"FT	49	22	22	1	5	10	40	5	pce
<b>1126813</b>	25-Rp1"FT	54	22	27	1	5	10	35	5	pce

## Uponor Q&E DR-Brass adapter swivel nut LF



Item no.	Dimension	l	l1	l2	G	z1	p	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm	bar			
<b>1126821</b>	16-G $\frac{1}{2}$ "SN	36	8	18	$\frac{1}{2}$	10	10	100	5	pce
<b>1126822</b>	20-G $\frac{1}{2}$ "SN	47	8	22	$\frac{1}{2}$	17	10	60	5	pce
<b>1126823</b>	20-G $\frac{3}{4}$ "SN	41	9	22	$\frac{3}{4}$	10	10	50	5	pce
<b>1126824</b>	25-G $\frac{3}{4}$ "SN	53	9	27	$\frac{3}{4}$	17	10	60	5	pce
<b>1126825</b>	25-G1"SN	49	11	27	1	11	10	50	5	pce

# Uponor Q&E

## Uponor Q&E DR-Brass coupling LF



Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126789</b>	16-16	16	16	10	100	5	pce
<b>1126790</b>	20-20	20	20	10	80	5	pce
<b>1126791</b>	25-25	25	25	10	40	5	pce

## Uponor Q&E DR-Brass coupling with reducer LF




Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126792</b>	16-20	16	20	10	100	5	pce
<b>1126793</b>	16-25	16	25	10	80	5	pce
<b>1126794</b>	20-25	20	25	10	40	5	pce

## Uponor Q&E DR-Brass elbow adapter male thread LF




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126831</b>	16-G½"MT	27	32	½	14	14	10	80	5	pce
<b>1123832</b>	20-G½"MT	30	40	½	17	18	10	50	5	pce
<b>1123833</b>	20-R½"MT	30	40	½	17	18	10	200	5	pce
<b>1123834</b>	20-G¾"MT	31	40	¾	17	18	10	40	5	pce
<b>1126871</b>	25-G¾"MT	37	46	¾	20	19	10	40	5	pce



## Uponor Q&E DR-Brass elbow adapter female thread LF




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126835</b>	16-G½"FT	29	32	½	11	14	10	200	5	pce
<b>1126836</b>	20-G¾"FT	36	39	¾	17	17	10	200	5	pce
<b>1126837</b>	25-G¾"FT	39	46	¾	20	19	10	100	5	pce



## Uponor Q&E DR-Brass elbow adapter swivel nut LF



Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126826</b>	16-G½"SN	36	33	½	28	15	10	70	5	pce
<b>1126827</b>	20-G½"SN	36	33	½	28	11	10	50	5	pce



# Uponor Q&E

## Uponor Smart Aqua

### Specification

- Elbows for tap connection and
- Q&E rings must be ordered separately if not different mentioned

### Application


- For tap water installations

if not different mentioned:

- Male and female threads acc.to EN 10226-1.


## Uponor Smart Aqua U-tap elbow Q&E

- U elbow for loop installation



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	b mm	k mm	Qty 2	Qty 1	UOM
<b>1059820*</b>	16-Rp $\frac{1}{2}$ "FT-16	52	20	20	$\frac{1}{2}$	34	5	45	40	5	1	pce
<b>1059821*</b>	20-Rp $\frac{1}{2}$ "FT-20	56	20	20	$\frac{1}{2}$	35	5	45	40	5	1	pce

## Uponor Smart Aqua tap elbow Q&E LF



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126828</b>	16- $\frac{1}{2}$ "	37	15	26	$\frac{1}{2}$	19	5	10	150	5	pce
<b>1126869</b>	20- $\frac{1}{2}$ "	41	15	26	$\frac{1}{2}$	19	5	10	100	5	pce
<b>1126830</b>	20- $\frac{3}{4}$ "	44	15	27	$\frac{3}{4}$	22	5	10	100	5	pce

## Uponor Q&E DR-brass BP elbow LF



Item no.	Dimension	d mm	FT inch	p bar	l mm	Qty 2	Qty 1	UOM
<b>1126841</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	65	100	5	pce
<b>1126842</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	90	100	5	pce
<b>1126843</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	175	50	5	pce
<b>1126844</b>	16- $\frac{1}{2}$ "G MT	16	G $\frac{1}{2}$	10	200	50	5	pce
<b>1126845</b>	20- $\frac{1}{2}$ "G MT	20	G $\frac{1}{2}$	10	95	80	5	pce
<b>1126846</b>	20- $\frac{3}{4}$ "G MT	20	G $\frac{3}{4}$	10	200	100	5	pce
<b>1126847</b>	20- $\frac{3}{4}$ "G MT	20	G $\frac{3}{4}$	10	100	50	5	pce

# Uponor Q&E

## Uponor Q&E DR-brass elbow 90 deg LF



Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126795</b>	16-16	16	16	10	250	5	pce
<b>1126796</b>	20-20	20	20	10	200	5	pce
<b>1126797</b>	25-25	25	25	10	100	5	pce

## Uponor Q&E DR-brass tee female LF



Item no.	Dimension	d mm	FT inch	d1 mm	p bar	Qty 2	Qty 1	UOM
<b>1126838</b>	25-1/2-25	25	1/2	25	10	80	5	pce
<b>1126839</b>	25-3/4-25	25	3/4	25	10	80	5	pce

## Uponor Q&E DR-brass tee equal LF



Item no.	Dimension	d mm	d1 mm	d2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126798</b>	16-16-16	16	16	16	10	70	5	pce
<b>1126799</b>	20-20-20	20	20	20	10	35	5	pce
<b>1126800</b>	25-25-25	25	25	25	10	20	5	pce

## Uponor Q&E DR-Brass tee with reducer LF



Item no.	Dimension	d mm	d1 mm	d2 mm	p bar	Qty 2	Qty 1	UOM
<b>1126801</b>	16-20-16	16	20	16	10	40	5	pce
<b>1126802</b>	20-16-16	20	16	16	10	40	5	pce
<b>1126803</b>	20-16-20	20	16	20	10	40	5	pce
<b>1126804</b>	20-20-16	20	20	16	10	40	5	pce
<b>1126805</b>	25-16-25	25	16	25	10	40	5	pce
<b>1126806</b>	25-20-25	25	20	25	10	40	5	pce

# Uponor Q&E

## Uponor Q&E DR-Brass adapter LF



Item no.	Dimension	d mm	d1 inch	p bar	Qty 2	Qty 1	UOM
<b>1126848</b>	16-15cu (for soldering)	16	1/2	10	100	5	pce
<b>1126849</b>	20-15/22cu (for soldering)	20	1/2	10	100	5	pce
<b>1126850</b>	20-3/4"cu (for soldering)	20	3/4	10	100	5	pce
<b>1126851</b>	25-1"cu (for soldering)	20	1	10	100	5	pce

## Uponor Q&E DR-Brass CU-Press adapter LF




Item no.	Dimension	d mm	d1 inch	p bar	Qty 2	Qty 1	UOM
<b>1126852</b>	16-1/2"cu press	16	1/2	10	100	5	pce
<b>1126853</b>	20-3/4"cu press	20	1/2	10	100	5	pce
<b>1126850</b>	25-1"cu press	25	1	10	100	5	pce

## Uponor Q&E DR-Brass plugs LF



Item no.	Dimension	d mm	p bar	Qty 2	Qty 1	UOM
<b>1126807</b>	16	16	10	100	5	pce
<b>1126808</b>	20	20	10	80	5	pce

## Uponor Q&E DR-Brass adapter S-Press



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1062845</b>	16-Q&E16	47	22	18	8	20	1	pce
<b>1062846</b>	20-Q&E20	52	23	22	8	10	1	pce
<b>1062861</b>	25-Q&E25	65	31	27	8	10	1	pce







# Flexible Pipe Systems Tools and Accessories

# Uponor PEX Tools

## Uponor Q&E Expansion tool with heads M12 Set

- Electromechanical driving machine, delivered in a plastic case including two 12V Li-Ion rechargeable batteries and one quick charger 220-240V/50-60Hz and lubricant (Mo).
- Metal gearbox and metal housing. Incl. LED working light.
- Instruction manual in the case. Automatic rotation with M12 expanding heads.
- Use for 6 bar pipes in dimensions up to 32 mm.
- Insert for 10 bar pipes in dimensions up to 25 mm..

Technical data:

- Charging voltage: 12 V
- Charge level display: Optical display
- Battery charging time: approx. 0.5 hrs.
- For dimensions: ≤ 32 mm (AK5/6 bar), ≤ 25 mm (AK2/10 bar)



Item no.	Dimension	Qty 1	UOM
1057167	16/20/25 10bar	1	set

## Uponor Q&E Expansion head M12/Rapid Seal

- Suitable for Q&E expanding tool M12 / M12 FUEL



Item no.	Dimension	Qty 1	UOM
1119380	9,9x1.1	1	pce

## Uponor Q&E expansion head M12/M18

- Suitable for Q&E expanding tool M12 / M12 FUEL



Item no.	Dimension	d mm	s mm	p bar	stroke mm	Qty 1	UOM
1057172	16x1,8/2,0/2,2	16	1,8/2,0/2,2	10	14/25	1	pce
1057174	20x2,8	20	2,8	10	14/25	1	pce
1057176	25x3,5	25	3,5	10	14/25	1	pce

## Uponor Q&E expansion tool spare battery M12



Item no.	Dimension	Qty 2	Qty 1	UOM
1061185	4Ah	12	1	pce

# Uponor PEX Tools

## Uponor Q&E expansion tool charger M12/M18 PEX



Item no.	Dimension	OV V	Qty 1	UOM
<b>1085101</b>	220-240V/50-60Hz	230	1	pce

## Uponor Multi pipe & conduit cutting tool

- Easy cutting with a special triangle blade
- outside diameters 12-25 mm



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1089674</b>	12-25	36	1	pce
<b>1089776</b>	12-25 blade	150	1	pce

## Uponor Flex pipe cutting tool PEX

- Pipe cutting tool for Uponor flexible pipes, outside diameters 12-25 mm.
- Blades not compatible with Uponor pipe cutter 1001369



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1089673</b>	12-25	36	1	pce

## Uponor Q&E graphite paste



Item no.	Dimension	Weight kg	Qty 1	UOM
<b>1005017</b>	100g	0,10	1	pce

# Uponor Accessories

## Uponor plastic pipe bend support

Made of impact resistant plastic as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
<b>1009004</b>	16	16	90	2340	10	pce
<b>1009233</b>	20	20	100	2340	10	pce

## Uponor Galvanised Steel pipe bend support

Made of galvanised steel as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
<b>1009006</b>	25 Galv. Steel	20	90	5000	20	pce



# Multilayer Pipe Systems

# Uponor Uni Pipe PLUS



The Uni Pipe PLUS is Uponor's unique multilayer composite pipe for tap water and heating/cooling application. Its bend radius is up to 40 per cent smaller than current multilayer composite pipes: changes of

direction when installing can be achieved by bending the pipe, reducing fitting requirements and installation time.

## Your benefits

- Seamless or OWC-technology for highest level of safety
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier
- Lightweight



## Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according EN 806.

## Application


- Tested/Approved according EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Certification

- WaterMark Certified to AS 4176.2:2010 Multilayer pipes for pressure application Part 2: Multilayer piping Systems for hot and cold water plumbing applications- Pipes ( ISO 21003-2:2008, MOD)
- AS 4176.3:2010 Multilayer pipes for pressure applications Part 3: Multilayer piping systems for hot and cold water plumbing applications—Fittings (ISO 21003-3:2008, MOD)




## Uponor Uni Pipe PLUS white S



Item no.	Dimension	L do s m mm mm	Qty 2	Qty 1	UOM
1059572	16x2,0 5m	5 16 2,0	125	5	m
1059573	20x2,25 5m	5 20 2,25	85	5	m
1059574	25x2,5 5m	5 25 2,5	50	5	m
1059575	32x3,0 5m	5 32 3	35	5	m

## Uponor MLC pipe white S

- bar




Item no.	Dimension	L do s m mm mm	Qty 2	Qty 1	UOM
1013446	40x4,0 5m	5 40 4	20	5	m
1013449	50x4,5 5m	5 50 4,5	20	5	m
1013451	63x6,0 5m	5 63 6	15	5	m
1013453	75x7,5 5m	5 75 7,5	255	5	m
1013455	90x8,5 5m	5 90 8,5	255	5	m
1013457	110x10,0 5m	5 110 10	165	5	m

# Uponor Uni Pipe PLUS

## Uponor Uni Pipe PLUS white

- coil



Item no.	Dimension	L m	do mm	s mm	Qty 2	Qty 1	UOM
<b>1059576</b>	16x2,0 100m	100	16	2,0	2000	100	m
<b>1059578</b>	16x2,0 500m	500	16	2,0	3500	500	m
<b>1059577</b>	16x2,0 200m	200	16	2	2600	200	m
<b>1059579</b>	20x2,25 100m	100	20	2,25	1300	100	m
<b>1059581</b>	25x2,5 50m	50	25	2,5	700	50	m
<b>1059583</b>	32x3,0 50m	50	32	3	400	50	m

# Uponor Uni Pipe PLUS


## Uponor Uni Pipe PLUS insulated

### Specification

- Consists of pipe and insulating layer.
- Supplied in coils.
- pipe insulation made of polyethylene foam with closed-cell material structure.
- With sturdy, seamless foil coating

## Uponor Uni Pipe PLUS white insulated S10 WLS 035


- coil
- Insulation thickness 10 mm
- thermal conductivity  $\lambda=0,035 \text{ W/m}^{\circ}\text{k}$
- round extruded



Item no.	Dimension	L m	do mm	do1 mm	s mm	s1 mm	colour	Qty 2	Qty 1	UOM
<b>1062181</b>	16x2,0 blue 75m	75	16	36	2	10	blue	450	75	m
<b>1062182</b>	20x2,25 blue 75m	75	20	40	2,25	10	blue	525	75	m
<b>1062183</b>	25x2,5 blue 50m	50	25	45	2,5	10	blue	350	50	m

## Uponor Uni Pipe PLUS white insulated S13 BL-S2-D0


- coil
- Insulation thickness 13 mm
- thermal conductivity  $\lambda=0,04 \text{ W/m}^{\circ}\text{k}$
- round extruded



Item no.	Dimension	L m	do mm	do1 mm	s mm	s1 mm	colour	Qty 2	Qty 1	UOM
<b>1093952</b>	16x2,0 blue 75m	75	16	42	2	13	blue	450	75	m
<b>1093953</b>	16x2,0 red 75m	75	16	42	2	13	red	450	75	m
<b>1093954</b>	20x2,25 blue 75m	75	20	46	2,25	10	blue	450	75	m
<b>1093955</b>	20x2,25 red 75m	75	20	46	2,25	10	red	450	75	m
<b>1094883</b>	25x2,5 blue 50m	50	25	51	2,5	10	blue	200	50	m

## Uponor Uni Pipe PLUS white insulated S15 Clima


- coil
- Insulation thickness 15 mm
- thermal conductivity  $\lambda=0,040 \text{ W/m}^{\circ}\text{k}$
- round extruded



Item no.	Dimension	L m	do mm	do1 mm	s mm	s1 mm	colour	Qty 2	Qty 1	UOM
<b>1088239</b>	32x3,0 blue 25m	23	32	62	3	15	blue	225	25	m

## Uponor Uni Pipe PLUS white in conduit


- pipe in conduit



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	colour	Qty 2	Qty 1	UOM
<b>1063059</b>	16x2,0 - 25/20 blue 75m	75	20	16	25	2,0	blue	1125	75	m
<b>1063060</b>	20x2,25 - 28/23 blue 75m	75	23	20	28	2,25	blue	900	75	m
<b>1063061</b>	16x2,0 - 25/20 red 75m	75	20	16	25	2,0	red	1125	75	m
<b>1063062</b>	20x2,25 - 28/23 red 75m	75	23	20	28	2,25	red	900	75	m



# Uponor S-Press PLUS



S-Press PLUS/ S-Press, our new generation of press fittings, is the perfect solution for ensuring permanently tight pipe connections. It's 100% backward compatible with current Uponor composite pipes and tools.

Available in dimensions from 16 to 75 mm in both metal and plastic, S-Press PLUS/ S-Press are the fittings that knows no compromise.

## Your benefits

- **TOUGH:** Withstand harshest conditions
- **SAFE:** Ensuring your perfect pressing result
- **EASY:** Simplifying planning and installation
- **SMART:** Answering all your questions on site



## Specification

- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

## Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

## Certification

- WaterMark Certified to AS 4176.2:2010 Multilayer pipes for pressure application Part 2: Multilayer piping Systems for hot and cold water plumbing applications- Pipes ( ISO 21003-2:2008, MOD)
- AS 4176.3:2010 Multilayer pipes for pressure applications Part 3: Multilayer piping systems for hot and cold water plumbing applications—Fittings (ISO 21003-3:2008, MOD)



## Uponor S-Press PLUS/ S-Press made of PPSU


### Specification

- made of PPSU

# Uponor S-Press PLUS

## Uponor S-Press PLUS elbow PPSU


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1039929</b>	16-16	33	33	13	13	80	20	pce
<b>1039930</b>	20-20	37	37	16	16	80	10	pce
<b>1039931</b>	25-25	48	48	19	19	80	10	pce
<b>1039932</b>	32-32	51	51	23	23	20	5	pce

## Uponor S-Press composite elbow PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1046386</b>	40-40	68	68	29	29	960	5	pce
<b>1046387</b>	50-50	73	73	34	34	576	3	pce
<b>1032877</b>	63-63	101	101	40	40	210	1	pce
<b>1032878</b>	75-75	108	108	47	47	210	1	pce

## Uponor S-Press composite elbow 45° PPSU

- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1046388</b>	40-40	56	56	17	17	960	5	pce
<b>1046389</b>	50-50	59	59	20	20	576	3	pce
<b>1032879</b>	63-63	83	83	23	23	192	1	pce
<b>1032880</b>	75-75	86	86	25	25	192	1	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS coupling PPSU



- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1039933</b>	16-16	51	20	20	11	80	20	pce
<b>1039934</b>	20-20	54	21	21	11	80	10	pce
<b>1039935</b>	25-25	68	28	28	11	80	10	pce
<b>1039936</b>	32-32	69	28	28	13	80	10	pce

## Uponor S-Press composite coupling PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1046401</b>	40-40	91	39	39	13	960	5	pce
<b>1046402</b>	50-50	91	39	39	13	576	3	pce
<b>1032881</b>	63-63	137	61	61	15	384	1	pce
<b>1032882</b>	75-75	137	61	61	15	384	1	pce

## Uponor S-Press PLUS reducer PPSU

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1039937</b>	20-16	53	21	20	11	80	20	pce
<b>1039938</b>	25-16	60	28	20	11	80	10	pce
<b>1039939</b>	25-20	61	28	21	11	80	10	pce
<b>1039940</b>	32-25	69	28	28	13	80	10	pce

# Uponor S-Press PLUS

## Uponor S-Press reducer PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1039941</b>	40-25	80	39	28	12	960	5	pce
<b>1039942</b>	40-32	80	39	28	13	960	5	pce
<b>1039943</b>	50-32	80	39	28	13	1152	3	pce
<b>1046406</b>	50-40	91	39	39	13	576	3	pce
<b>1032883</b>	63-40	115	61	37	17	384	1	pce
<b>1032884</b>	63-50	115	61	37	17	384	1	pce
<b>1032885</b>	75-50	115	61	37	17	384	1	pce
<b>1032886</b>	75-63	137	61	59	17	384	1	pce

## Uponor S-Press PLUS tee PPSU


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1039944</b>	16-16-16	33	33	33	13	13	13	80	10	pce
<b>1039945</b>	20-20-20	37	37	37	16	16	16	80	10	pce
<b>1039946</b>	25-25-25	48	48	48	19	19	19	20	5	pce
<b>1039947</b>	32-32-32	51	51	51	23	23	23	20	5	pce

## Uponor S-Press composite tee PPSU

- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1046390</b>	40-40-40	68	68	68	29	29	29	720	5	pce
<b>1046391</b>	50-50-50	73	73	73	33	33	33	288	3	pce
<b>1032887</b>	63-63-63	101	101	101	42	40	42	150	1	pce
<b>1032888</b>	75-75-75	108	107	108	47	47	47	150	1	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS tee red. PPSU


- Fixed stainless steel sleeve
- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1039948</b>	16-20-16	35	35	35	15	13	15	80	10	pce
<b>1039949</b>	20-16-16	37	36	36	16	16	16	80	10	pce
<b>1039950</b>	20-16-20	37	36	37	16	16	16	80	10	pce
<b>1039951</b>	20-20-16	37	37	36	16	16	16	80	10	pce
<b>1039952</b>	20-25-20	41	48	41	19	19	19	80	10	pce
<b>1039953</b>	25-16-16	48	39	39	19	19	19	80	10	pce
<b>1039954</b>	25-16-20	48	39	41	19	19	19	80	10	pce
<b>1039955</b>	25-16-25	48	39	48	19	19	19	80	10	pce
<b>1039956</b>	25-20-20	48	41	41	19	19	19	80	10	pce
<b>1039957</b>	25-20-25	48	41	48	19	19	19	80	10	pce
<b>1039958</b>	32-16-32	51	43	51	23	23	23	20	5	pce
<b>1039959</b>	32-20-32	51	44	51	23	23	23	20	5	pce
<b>1039960</b>	32-25-25	51	51	51	23	23	23	20	5	pce
<b>1039961</b>	32-25-32	51	51	51	23	23	23	20	5	pce

## Uponor S-Press tee red. PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1039962</b>	40-20-40	68	49	68	29	28	29	960	5	pce
<b>1039963</b>	40-25-32	68	56	56	29	28	28	960	5	pce
<b>1039964</b>	40-25-40	68	56	68	29	28	29	720	5	pce
<b>1039965</b>	40-32-32	68	56	56	29	28	28	960	5	pce
<b>1039966</b>	40-32-40	68	56	68	29	28	29	720	5	pce
<b>1039967</b>	50-25-40	73	61	73	34	33	34	432	3	pce
<b>1039968</b>	50-25-50	73	61	73	34	33	34	432	3	pce
<b>1039969</b>	50-32-50	73	61	73	34	33	34	432	3	pce

## Uponor S-Press composite tee reducer PPSU

- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1046400</b>	50-40-50	73	73	73	33	33	33	288	3	pce
<b>1032889</b>	63-25-63	101	68	101	40	39	40	150	1	pce
<b>1032890</b>	63-32-63	101	68	101	40	39	40	150	1	pce
<b>1032891</b>	63-40-63	101	79	101	40	40	40	150	1	pce
<b>1032892</b>	75-32-75	108	74	108	47	45	47	150	1	pce
<b>1032893</b>	75-40-75	108	86	108	47	44	47	150	1	pce
<b>1032894</b>	75-50-75	108	86	108	47	49	47	150	1	pce

# Uponor S-Press PLUS


## Uponor S-Press PLUS

### Specification

- made of tin-plated DR brass

### Uponor S-Press PLUS adapter male thread

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l mm	l1 mm	l2 mm	R inch	z1 mm	Qty 2	Qty 1	UOM
<b>1070502</b>	16-R $\frac{1}{2}$ "MT	44	14	20	$\frac{1}{2}$	10	80	20	pce
<b>1070503</b>	16-R $\frac{3}{4}$ "MT	46	16	20	$\frac{3}{4}$	11	120	15	pce
<b>1133523</b>	20-R $\frac{1}{2}$ "MT	45	14	21	$\frac{1}{2}$	10	80	20	pce
<b>1070505</b>	20-R $\frac{3}{4}$ "MT	48	15	21	$\frac{3}{4}$	11	80	10	pce
<b>1070506</b>	20-R1"MT	54	17	21	1	16	80	10	pce
<b>1070507</b>	25-R $\frac{3}{4}$ "MT	55	15	28	$\frac{3}{4}$	11	80	10	pce
<b>1070508</b>	25-R1"MT	62	18	28	1	16	40	5	pce
<b>1070509</b>	32-R1"MT	62	17	28	1	16	40	5	pce
<b>1070510</b>	32-R1 $\frac{1}{4}$ "MT	66	19	28	1 $\frac{1}{4}$	19	20	5	pce

### Uponor S-Press adapter male thread

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l mm	l1 mm	l2 mm	R inch	z1 mm	d mm	Qty 2	Qty 1	UOM
<b>1046901</b>	40-R1 $\frac{1}{4}$ "MT	78	20	38	1 $\frac{1}{4}$	20		960	5	pce
<b>1046902</b>	40-R1 $\frac{1}{2}$ "MT	80	20	38	1 $\frac{1}{2}$	22	40	960	5	pce
<b>1046905</b>	50-R1 $\frac{1}{2}$ "MT	80	20	38	1 $\frac{1}{2}$	22	50	1152	3	pce
<b>1046906</b>	50-R2"MT	84	24	38	2	22	50	576	3	pce
<b>1032895</b>	63-R2"MT	111	28	61	2	22		336	1	pce
<b>1032896</b>	75-R2 $\frac{1}{2}$ "MT	110	27	61	2 $\frac{1}{2}$	22		336	1	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS adapt. female thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l mm	l1 mm	l2 mm	Rp inch	z1 mm	Qty 2	Qty 1	UOM
<b>1070515</b>	16-Rp $\frac{1}{2}$ "FT	47	15	20	$\frac{1}{2}$	12	80	20	pce
<b>1070516</b>	20-Rp $\frac{1}{2}$ "FT	47	15	21	$\frac{1}{2}$	10	120	15	pce
<b>1070517</b>	20-Rp $\frac{3}{4}$ "FT	51	16	21	$\frac{3}{4}$	14	80	10	pce
<b>1070518</b>	20-Rp1"FT	52	19	21	1	12	80	20	pce
<b>1070519</b>	25-Rp $\frac{3}{4}$ "FT	56	17	28	$\frac{3}{4}$	11	40	5	pce
<b>1070520</b>	25-Rp1"FT	59	19	28	1	12	40	5	pce
<b>1070521</b>	32-Rp1"FT	58	20	28	1	10	40	5	pce
<b>1070522</b>	32-Rp1 $\frac{1}{4}$ "FT	62	21	28	1 $\frac{1}{4}$	13	20	5	pce

## Uponor S-Press adapter female thread

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	Rp inch	z1 mm	Qty 2	Qty 1	UOM
<b>1046903</b>	40-Rp1 $\frac{1}{4}$ "FT	73	21	38	1 $\frac{1}{4}$	14	960	5	pce
<b>1046904</b>	40-Rp1 $\frac{1}{2}$ "FT	77	21	38	1 $\frac{1}{2}$	18	960	5	pce
<b>1046907</b>	50-Rp1 $\frac{1}{2}$ "FT	73	21	38	1 $\frac{1}{2}$	14	1152	3	pce


# Uponor S-Press PLUS

## Uponor S-Press PLUS elbow

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1070523</b>	16-16	34	34	14	14	80	20	pce
<b>1070524</b>	20-20	37	37	16	16	80	10	pce
<b>1070525</b>	25-25	47	47	19	19	40	5	pce
<b>1070526</b>	32-32	51	51	23	23	20	5	pce




## Uponor S-Press elbow

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1046908</b>	40-40	72	72	34	34	600	5	pce
<b>1046911</b>	50-50	79	79	41	41	240	3	pce




## Uponor S-Press PLUS bend

- Made of casted DR brass
- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- extra low pressure loss



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1070527</b>	16-16	37	37	17	17	80	10	pce
<b>1070528</b>	20-20	40	40	19	19	80	10	pce
<b>1070529</b>	25-25	50	50	22	22	40	5	pce
<b>1070530</b>	32-32	56	56	28	28	20	5	pce






# Uponor S-Press PLUS

## Uponor S-Press PLUS elbow male thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	R inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1070532</b>	16-R $\frac{1}{2}$ "MT	30	37	$\frac{1}{2}$	15	17	80	20	pce
<b>1070533</b>	20-R $\frac{1}{2}$ "MT	32	41	$\frac{1}{2}$	15	19	80	10	pce
<b>1070534</b>	20-R $\frac{3}{4}$ "MT	34	41	$\frac{3}{4}$	18	19	80	10	pce
<b>1070535</b>	25-R $\frac{3}{4}$ "MT	36	48	$\frac{3}{4}$	20	19	40	5	pce
<b>1070536</b>	25-R1"MT	43	51	1	22	23	40	5	pce
<b>1070537</b>	32-R1"MT	43	51	1	22	23	20	5	pce

## Uponor S-Press elbow adapter male thread


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	R inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1046909</b>	40-R1 $\frac{1}{4}$ "MT	49	72	1 $\frac{1}{4}$	30	34	500	5	pce

## Uponor S-Press PLUS elbow female thread

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1070539</b>	16-Rp $\frac{1}{2}$ "FT	33	38	$\frac{1}{2}$	18	18	80	10	pce
<b>1070540</b>	20-Rp $\frac{1}{2}$ "FT	36	41	$\frac{1}{2}$	21	19	80	10	pce
<b>1070541</b>	20-Rp $\frac{3}{4}$ "FT	36	43	$\frac{3}{4}$	19	22	40	10	pce
<b>1070542</b>	25-Rp $\frac{3}{4}$ "FT	40	50	$\frac{3}{4}$	23	22	20	5	pce
<b>1070543</b>	25-Rp1"FT	45	54	1	25	26	20	5	pce
<b>1070544</b>	32-Rp1"FT	49	54	1	30	26	20	5	pce

# Uponor S-Press PLUS

## Uponor S-Press elbow adap. female thread


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1046910</b>	40-Rp1 ½"FT	59	75	1 ½	38	37	500	5	pce
<b>1046912</b>	50-Rp1 ½"FT	59	79	1 ½	38	41	300	3	pce

## Uponor S-Press PLUS elbow 45


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1070545</b>	25-25	46	46	18	18	20	5	pce
<b>1070546</b>	32-32	49	49	23	23	20	5	pce

## Uponor S-Press elbow 45

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
<b>1046913</b>	40-40	59	59	21	21	500	5	pce
<b>1046914</b>	50-50	63	63	25	25	300	3	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS coupling


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1070547</b>	16-16	51	20	20	12	80	20	pce
<b>1133566</b>	20-20	54	21	21	12	80	10	pce
<b>1133567</b>	25-25	68	28	28	12	80	10	pce
<b>1133568</b>	32-32	68	28	28	12	40	5	pce

## Uponor S-Press coupling


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1046932</b>	40-40	88	38	38	12	960	5	pce
<b>1046935</b>	50-50	88	38	38	12	576	3	pce

## Uponor S-Press PLUS reducer

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1133569</b>	20-16	53	21	20	12	80	20	pce
<b>1133570</b>	25-16	60	28	20	12	80	10	pce
<b>1133571</b>	25-20	61	28	21	12	80	10	pce
<b>1133572</b>	32-20	61	28	21	12	80	10	pce
<b>1133573</b>	32-25	68	28	28	12	80	10	pce


# Uponor S-Press PLUS

## Uponor S-Press reducer

- Made of tin-plated brass



Item no.	Dimension	l	l1	l2	z1	Qty 2	Qty 1	UOM
		mm	mm	mm	mm			
<b>1046934</b>	50-40	89	38	38	14	576	3	pce




## Uponor S-Press PLUS tee

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1	l2	l3	z1	z2	z3	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm	mm			
<b>1070560</b>	16-16-16	34	34	34	14	14	14	80	10	pce
<b>1070561</b>	20-20-20	37	37	37	16	16	16	80	10	pce
<b>1070562</b>	25-25-25	47	47	47	19	19	19	20	5	pce
<b>1070563</b>	32-32-32	51	51	51	23	23	23	20	5	pce




## Uponor S-Press tee

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1	l2	l3	z1	z2	z3	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm	mm			
<b>1046921</b>	40-40-40	72	72	72	34	34	34	400	5	pce
<b>1046928</b>	50-50-50	79	79	79	41	41	41	300	3	pce



# Uponor S-Press PLUS

## Uponor S-Press PLUS tee reducer

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1070566</b>	16-20-16	36	37	36	16	16	16	80	10	pce
<b>1070567</b>	20-16-16	35	36	34	14	16	14	40	10	pce
<b>1070568</b>	20-16-20	35	36	35	14	16	14	80	20	pce
<b>1070569</b>	20-20-16	37	37	36	16	16	16	80	20	pce
<b>1070570</b>	20-25-16	40	47	38	19	19	19	40	10	pce
<b>1070571</b>	20-25-20	40	47	40	19	19	19	40	10	pce
<b>1070572</b>	25-16-16	44	38	36	16	19	17	40	5	pce
<b>1070573</b>	25-16-20	44	38	38	16	19	17	40	5	pce
<b>1070574</b>	25-16-25	42	38	42	14	19	14	20	5	pce
<b>1070575</b>	25-20-16	44	40	36	16	19	17	40	5	pce
<b>1070576</b>	25-20-20	44	40	38	16	19	17	40	5	pce
<b>1070577</b>	25-20-25	44	40	44	16	19	16	20	5	pce
<b>1070578</b>	25-25-16	47	47	38	19	19	19	20	5	pce
<b>1070579</b>	25-32-25	50	48	50	22	20	22	20	5	pce
<b>1070580</b>	32-16-32	43	42	43	15	22	15	20	5	pce
<b>1070581</b>	32-20-32	45	43	45	17	22	17	20	5	pce
<b>1070582</b>	32-25-25	48	50	48	20	22	20	20	5	pce
<b>1070583</b>	32-25-32	48	50	48	20	22	20	20	5	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS tee male thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	l3 mm	R mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1070592</b>	16-R $\frac{1}{2}$ "MT-16	38	30	38	$\frac{1}{2}$	18	15	18	40	10	pce
<b>1070593</b>	25-R $\frac{3}{4}$ "MT-25	48	36	48	$\frac{3}{4}$	19	21	19	20	5	pce
<b>1070594</b>	32-R $\frac{3}{4}$ "MT-32	48	40	48	$\frac{3}{4}$	19	25	19	20	5	pce

## Uponor S-Press PLUS tee female thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1070595</b>	16-Rp $\frac{1}{2}$ "FT-16	38	33	38	$\frac{1}{2}$	18	18	18	40	10	pce
<b>1070596</b>	20-Rp $\frac{1}{2}$ "FT-20	40	35	40	$\frac{1}{2}$	19	20	19	60	15	pce
<b>1070597</b>	20-Rp $\frac{3}{4}$ "FT-20	43	37	43	$\frac{3}{4}$	22	20	22	40	10	pce
<b>1070598</b>	25-Rp $\frac{1}{2}$ "FT-25	48	37	48	$\frac{1}{2}$	19	22	19	20	5	pce
<b>1070599</b>	25-Rp $\frac{3}{4}$ "FT-25	50	40	50	$\frac{3}{4}$	22	23	22	20	5	pce
<b>1070600</b>	32-Rp $\frac{1}{2}$ "FT-32	47	40	47	$\frac{1}{2}$	18	25	18	20	5	pce
<b>1070601</b>	32-Rp $\frac{3}{4}$ "FT-32	51	44	51	$\frac{3}{4}$	23	27	23	20	5	pce

## Uponor S-Press tee adapter female thread

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
<b>1046922</b>	40-Rp $\frac{1}{2}$ "FT-40	69	47	69	$\frac{1}{2}$	31	30	31	500	5	pce
<b>1046923</b>	40-Rp $\frac{3}{4}$ "FT-40	64	47	64	$\frac{3}{4}$	26	31	26	400	5	pce
<b>1046929</b>	50-Rp1"FT-50	72	56	72	1	34	37	34	240	3	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS adapter swivel nut


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.



Item no.	Dimension	l	l1	l2	G	z1	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm			
<b>1070602</b>	16-G $\frac{1}{2}$ "SN	53	8	20	$\frac{1}{2}$	25	30	1	pce
<b>1070603</b>	16-G $\frac{3}{4}$ "SN	44	8	20	$\frac{3}{4}$	17	20	1	pce
<b>1070604</b>	20-G $\frac{1}{2}$ "SN	59	8	21	$\frac{1}{2}$	30	20	1	pce
<b>1070605</b>	20-G $\frac{3}{4}$ "SN	46	8	21	$\frac{3}{4}$	17	20	1	pce
<b>1070606</b>	25-G $\frac{3}{4}$ "SN	64	8	28	$\frac{3}{4}$	28	15	1	pce
<b>1070607</b>	25-G1"SN	57	9	28	1	20	15	1	pce
<b>1070610</b>	32-G1 $\frac{1}{4}$ "SN	59	9	28	1 $\frac{1}{4}$	22	10	1	pce

## Uponor S-Press adapter swivel nut

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.




Item no.	Dimension	l	l1	l2	G	z1	Qty 2	Qty 1	UOM
		mm	mm	mm	inch	mm			
<b>1046937</b>	40-G1 $\frac{1}{2}$ "SN	77	10	38	1 $\frac{1}{2}$	30	960	5	pce
<b>1046939</b>	50-G2"SN	82	12	38	2	32	576	3	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS tap elbow M


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.



Item no.	Dimension	I1 mm	I2 mm	I3 mm	Rp inch	z1 mm	z3 mm	k mm	Qty 2	Qty 1	UOM
<b>1070638</b>	16-Rp $\frac{3}{8}$ "FT	41	17	22	$\frac{3}{8}$	21	11	40	40	10	pce
<b>1070639</b>	16-Rp $\frac{1}{2}$ "FT	41	17	22	$\frac{1}{2}$	21	7	40	40	10	pce
<b>1070640</b>	20-Rp $\frac{1}{2}$ "FT	42	17	23	$\frac{1}{2}$	21	8	40	40	10	pce
<b>1070641</b>	20-Rp $\frac{3}{4}$ "FT	45	17	23	$\frac{3}{4}$	24	7	40	20	5	pce
<b>1070642</b>	25-Rp $\frac{3}{4}$ "FT	54	27	25	$\frac{3}{4}$	26	8	40	20	5	pce

## Uponor S-Press PLUS tap elbow L


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.



Item no.	Dimension	I1 mm	I2 mm	I3 mm	Rp inch	z1 mm	z3 mm	k mm	Qty 2	Qty 1	UOM
<b>1070644</b>	16-Rp $\frac{1}{2}$ "FT	42	20	30	$\frac{1}{2}$	22	15	40	40	10	pce
<b>1070645</b>	20-Rp $\frac{1}{2}$ "FT	46	20	30	$\frac{1}{2}$	25	15	40	40	10	pce

## Uponor S-Press PLUS sound + leak protect

- Set is suitable for two Uponor S-Press PLUS tap elbows 16-Rp $\frac{1}{2}$ "FT or 20-Rp $\frac{1}{2}$ "FT
- Pins and screws M6 x 16 included
- Made of EPP
- Sound protection acc., VDI 4100
- Drainage function conform to DIN 18534




Item no.	Dimension	I1 mm	I2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1121193</b>	16-20	20	74	3	192	1	set
<b>1121194</b>	16-20	23	71	3	192	1	set



# Uponor S-Press PLUS

## Uponor S-Press PLUS U-tap elbow


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.



Item no.	Dimension	l1 mm	l2 mm	l3 mm	l4 mm	Rp inch	z1 mm	z2 mm	z4 mm	b mm	k mm	Qty 2	Qty 1	UOM
<b>1070629</b>	16-Rp½"FT-16	56	56	20	23	½	36	36	8	45	40	20	5	pce
<b>1070630</b>	20-Rp½"FT-20	57	57	20	23	½	36	36	8	45	40	960	5	pce
<b>1070631</b>	20-Rp½"FT-16	57	56	20	23	½	36	36	8	45	40	960	5	pce
<b>1070632</b>	16-Rp½"FT-20	56	57	20	23	½	36	36	8	45	40	960	5	pce
<b>1070633</b>	25-Rp½"FT-25	64	64	27	24	½	36	36	9	60	40	576	3	pce
<b>1070634</b>	25-Rp½"FT-20	64	57	27	24	½	36	36	9	60	40	576	3	pce

## Uponor S-Press PLUS tap elbow twin 90 long


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.
- Thread acc. to EN ISO 228-1



Item no.	Dimension	l1 mm	l2 mm	l3 mm	l4 mm	Rp inch	z1 mm	z2 mm	z3 mm	k mm	k1 mm	Qty 2	Qty 1	UOM
<b>1070648</b>	16-Rp½"FT-16	44	45	30	20	½	24	25	15	20	20	40	10	pce
<b>1070649</b>	20-Rp½"FT-20	46	46	30	20	½	24	25	15	20	20	40	10	pce

## Uponor S-Press PLUS stop end

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l mm	l1 mm	l2 mm	Qty 2	Qty 1	UOM
<b>1133625</b>	16	27	7	20	160	40	pce
<b>1133626</b>	20	28	7	21	7680	20	pce
<b>1133627</b>	25	35	7	28	3840	10	pce
<b>1133628</b>	32	35	7	28	1920	5	pce

# Uponor S-Press PLUS

## Uponor S-Press PLUS adapter wall penetr.


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- For lead-through through walls.
- Dimensions of attachment plate (H x W x D) 100 x 50 x 2 mm.
- Hole circle diameter 33 mm.



Item no.	Dimension	l	l1	l2	l3	s	Rp	z1	k	Qty 2	Qty 1	UOM
		mm	mm	mm	mm	mm	inch	mm	mm			
<b>1070652</b>	16-G $\frac{1}{2}$ "FT	51	17	20	100	2	$\frac{1}{2}$	14	40	5	1	pce

## Uponor S-Press PLUS adapter

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- With soldered copper pipe according EN 1057 (half hard / R250)
- complete tin-plated
- Attention:  
The copper side is for press connections and suitable compression fittings only.




Item no.	Dimension	l	l1	l2	z1	Qty 2	Qty 1	UOM
		mm	mm	mm	mm			
<b>1070615</b>	16-15CU	76	40	20	16	160	20	pce
<b>1070707</b>	20-15CU	76	39	21	16	3840	10	pce

# Uponor S-Press PLUS


## Uponor S-Press PLUS mounting plate

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment



NEW

Item no.	Dimension	l mm	s mm	h mm	k mm	k1 mm	w mm	Qty 2	Qty 1	UOM
<b>1121197</b>	80/150mm	265	3	9	80	150	35	5	1	pce




## Uponor S-Press PLUS mounting angle

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment



NEW

Item no.	Dimension	l mm	s mm	b mm	h mm	k mm	k1 mm	w mm	Qty 2	Qty 1	UOM
<b>1121195</b>	80/150mm	440	3	266	57	80	150	35	5	1	pce




## Uponor Smart Aqua single mounting angle

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows.
- Positioning of the connections in the given raster.
- Screws M6x12 acc. DIN 965 included. With holes and slots for easy attachment




Item no.	Dimension	l mm	b mm	h mm	Qty 2	Qty 1	UOM
<b>1057843</b>		144	82	46	5	1	pce



# Uponor S-Press PLUS

## Uponor Smart Aqua mounting rack


- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows.
- Positioning of the connections in the given raster.
- Screws M6x12 acc. DIN 965 included. With holes and slots for easy attachment



Item no.	Dimension	l mm	k mm	Qty 2	Qty 1	UOM
<b>1057844</b>	2m	2000	75	10	1	pce

## Uponor Smart Aqua 10 pins+20 screws

- Pins and screws for mounting plates, angles and tracks.




Item no.	Dimension	l mm	do1 mm	do2 mm	c/c1 mm	Qty 1	UOM
<b>1057847*</b>		17	4	10	10	1	set



# Riser System



# Uponor RS



Uponor RS is a unique system that follows a modular design principle for riser systems and other distribution lines. Just 40 system components enable hundreds of variations, making the system highly adaptable.

## Your benefits

- Innovative plug connection between body and adapter
- Fast and flexible: tool-free assembly, many variations
- More efficient stock management
- Re-adjustment possible until final installation
- Colour coding 16 -110mm for easy dimension selection



## Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

## Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

## Certification

- WaterMark Certified to AS 4176.2:2010 Multilayer pipes for pressure application Part 2: Multilayer piping Systems for hot and cold water plumbing applications- Pipes ( ISO 21003-2:2008, MOD)
- AS 4176.3:2010 Multilayer pipes for pressure applications Part 3: Multilayer piping systems for hot and cold water plumbing applications—Fittings (ISO 21003-3:2008, MOD)




## Uponor RS coupling

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.




Item no.	Dimension	l mm	Qty 2	Qty 1	UOM
<b>1029144</b>	RS2-RS2	58	480	1	pce
<b>1029145</b>	RS3-RS3	58	480	1	pce



# Uponor RS

## Uponor RS elbow


- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.



Item no.	Dimension	I1 mm	I2 mm	Qty 2	Qty 1	UOM
<b>1029138</b>	RS2-RS2	51	51	336	1	pce
<b>1029139</b>	RS3-RS3	68	68	240	1	pce

## Uponor RS elbow 45


- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.



Item no.	Dimension	I1 mm	I2 mm	Qty 2	Qty 1	UOM
<b>1029140</b>	RS2-RS2	51	51	336	1	pce
<b>1029141</b>	RS3-RS3	68	68	175	1	pce

## Uponor RS tee

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 3 lock pins.




Item no.	Dimension	I1 mm	I2 mm	I3 mm	Qty 2	Qty 1	UOM
<b>1029142</b>	RS2-RS2-RS2	51	51	51	336	1	pce
<b>1029143</b>	RS3-RS3-RS3	68	68	68	175	1	pce

# Uponor RS

## Uponor RS reducer


- Made of tin-plated brass
- Reducer from RS3 to RS2 including 1 lock pin.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1029146</b>	RS3-RS2	47	20	19	8	480	1	pce

## Uponor RS spacer


- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1046750</b>	RS2-RS2 l=5mm	45	20	20	5	480	1	pce
<b>1046751*</b>	RS3-RS3 l=5mm	45	20	20	5	240	1	pce

## Uponor RS spacer

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.




Item no.	Dimension	l mm	l1 mm	l2 mm	l3 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1046477*</b>	RS2-RS2 l=130mm	170	20	20	30	130	240	1	pce
<b>1046478*</b>	RS3-RS3 l=210mm	250	20	20	30	210	96	1	pce



# Uponor RS

## Uponor RS adapter S-Press


- Made of tin-plated brass
- Fits to all RS2 base parts.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1059397</b>	16-RS2	61	20	21	20	480	1	pce

## Uponor RS adapter S-Press PLUS


- tin plated
- made of DR material
- press without bevel



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1095818</b>	20-RS2	61	20	21	20	378	1	pce
<b>1095819</b>	25-RS2	75	20	28	27	378	1	pce
<b>1095820</b>	32-RS2	75	20	28	27	378	1	pce

## Uponor RS adapter S-Press

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
<b>1046940</b>	40-RS2	65	20	38	7	480	1	pce
<b>1046941</b>	50-RS2	65	20	38	7	480	1	pce
<b>1029125</b>	63-RS2	88	20	61	7	400	1	pce
<b>1029126</b>	75-RS2	88	20	61	7	400	1	pce
<b>1029127</b>	90-RS3	93	20	62	11	240	1	pce
<b>1029128</b>	110-RS3	93	20	62	11	240	1	pce

# Uponor RS

## Uponor RS adapter male thread


- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts



Item no.	Dimension	l mm	l1 mm	l2 mm	R inch	z1 mm	Qty 2	Qty 1	UOM
1059402	R1 ½"MT-RS2	62	20	24	1 ½	18	480	1	pce
1029131	R2"MT-RS2	66	20	23	2	23	480	1	pce
1029132	R2 ½"MT-RS2	63	20	27	2 ½	16	480	1	pce
1029133	R3"MT-RS3	73	20	30	3	23	240	1	pce

## Uponor RS adapter female thread


- Made of tin-plated brass.
- its to all RS2 or RS3 base parts



Item no.	Dimension	l mm	l1 mm	l2 mm	Rp inch	z1 mm	Qty 2	Qty 1	UOM
1059403	Rp½"FT-RS2	42	20	15	½	7	480	1	pce
1029134	Rp1"FT-RS2	45	20	19	1	6	480	1	pce
1029135	Rp2"FT-RS2	54	20	26	2	8	480	1	pce
1029136	Rp2 ½"FT-RS2	63	20	30	2 ½	12	480	1	pce
1059404	Rp½"FT-RS3	43	20	15	½	8	336	1	pce
1029137	Rp3"FT-RS3	65	20	33	3	12	240	1	pce

## Uponor RS flange adapter

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.



Item no.	Dimension	l mm	di mm	do mm	z1 mm	k mm	p bar	Qty 2	Qty 1	UOM
1059399*	RS2-DN65 (PN16)	45	48,7	185	25	145	16	90	1	pce
1029129*	RS3-DN80 (PN16)	45	78,1	200	25	160	16	90	1	pce
1029130	RS3-DN100 (PN16)	44	78,1	220	24	180	16	90	1	pce

## Uponor RS lock pin

- made of plastic
- to lock the RS insert to the RS base part.



Item no.	Dimension	colour	Qty 2	Qty 1	UOM
1042921	RS2 black	black	5000	10	pce
1042922	RS3 grey	grey		10	pce



**MLCP Tools**



# Uponor Cutting & Preperation

## Uponor Multi pipe cutting tool

- outside diameters 32-40 mm



Item no.	Dimension		Qty 2	Qty 1	UOM
<b>1089677</b>	32-40		12	1	pce
<b>1089779</b>	32-40	blade	50	1	pce

## Uponor Multi pipe cutting tool

- outside diameters 25-63 mm



Item no.	Dimension		Qty 2	Qty 1	UOM
<b>1089675</b>	25-63		12	1	pce
<b>1089777</b>	25-63	blade (wheel)	50	1	pce

## Uponor Multi pipe cutting tool

- outside diameters 50-125 mm



Item no.	Dimension		Qty 2	Qty 1	UOM
<b>1089676</b>	50-125		8	1	pce
<b>1089778</b>	50-125	blade (wheel)	50	1	pce

# Uponor Cutting & Preperation

## Uponor MLC pipe cutting + deburring tool



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1014334</b>	63-110	32	1	pce
<b>1014320</b>	63-110 blade (wheel)	100	1	pce

## Uponor MLC bevelling tool

- For bevelling the Uponor Uni Pipe PLUS and MLC pipes.
- Supplied with manual toggle. Without manual toggle to be used as attachment for self-driving screw with tapping screw thread.



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1006830</b>	16	50	1	pce
<b>1015749</b>	20	1200	1	pce
<b>1015756</b>	25	960	1	pce
<b>1015762</b>	32	900	1	pce

## Uponor MLC bevelling tool



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1006638</b>	40	600	1	pce
<b>1015808</b>	50	600	1	pce
<b>1014339</b>	63	600	1	pce
<b>1014344</b>	75	600	1	pce

## Uponor MLC bevelling tool

- For bevelling the Uponor Uni Pipe PLUS and MLC pipes.



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1015739</b>	16/20/25	60	1	pce

## Uponor MLC deburring tool universal



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1060167</b>		50	1	pce

# Uponor Cutting & Preperation

## Uponor MLC bending spring inside

- bending spring for Uponor Uni Pipe PLUS and MLC pipes.



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1013729</b>	16	100	1	pce
<b>1013734</b>	20	75	1	pce
<b>1013737</b>	25	50	1	pce
<b>1013739</b>	32	40	1	pce

## Uponor MLC bending spring outside

- bending spring for Uponor Uni Pipe PLUS and MLC pipes.



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1006639*</b>	14	550	1	pce
<b>1006640</b>	16	55	1	pce
<b>1013792</b>	20	45	1	pce
<b>1013794</b>	25	45	1	pce

## Uponor Uni Pipe PLUS bending tool

- producing evenly formed bends in Uponor Uni Pipe PLUS pipes with outer diameters up to 32 mm.

- Delivered complete in tool case with bending segments.



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1071925</b>	16-32	100	1	pce

# Uponor Pressing

## Uponor S-Press manual tool w/o inserts

- in conjunction with exchangeable inserts
- Supplied in case without exchangeable inserts



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
<b>1015764</b>	16-20	16-20	100	1	pce

## Uponor S-Press manual tool insert

- For inserting into the manual pressing tool



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
<b>1015777</b>	16	16	50	1	pce
<b>1015780</b>	20	20	50	1	pce

## Uponor S-Press tool UP110 without jaws

- supplied in carrying case, complete with battery and charger unit
- without pressing jaws.
- Range of application up to 110 mm.

Technical specifications:

- Quick pressing due to short pressing cycle
- Crimping force: linear thrust of approx. 32 kN
- Battery capacity: High-power Makita 3.0 Ah Li-Ion battery
- Charging time: 22 min
- Weight incl. battery: without jaw 3.5 kg
- Dimensions tool: 366 x 81 x 317 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1083612</b>		20	1	set

## Uponor S-Press battery UP110

- Akku 18 V / 3,0 Ah, Li-Ion (54 Wh)
- Battery voltage: 18 V
- Battery capacity: 3.0 Ah
- Charging time: With SPI S-PRESS BATTERY CHARGER: 22 min
- Cell technology: Li-Ion
- Weight: 0,6 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1083608*</b>		18	10	1	pce

# Uponor Pressing

## Uponor S-Press battery charger

- Quick-charger for 18V Li-Ion batteries, 230 V
- Charging time: 1.3 Ah 15 min,  
3.0 Ah 22 min
- Mains supply: 230 V AC
- Voltage range: 18 V
- Weight: 1,0 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1083610*</b>	Mini2, UP110	230	72	1	pce

## Uponor S-Press electric tool w/o jaws UP75

Technical specifications:

- Weight: 3.30 kg
- Nominal voltage: 230 V AC / 50 Hz
- Nominal capacity: 200 Watt
- Press power: ca. 32 kN
- Press duration: ca. 7 sec.



Item no.	Dimension	d mm	OV V	Qty 2	Qty 1	UOM
<b>1007082</b>		- 110	230	20	1	pce

## Uponor S-Press spare battery UP75

- for the battery powered pressing machine UP 75
- Not compatible to the Ni-Cd charger unit.



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1006949*</b>		12	12	1	pce

## Uponor S-Press spare charger Mini UP75

- or the re-chargeable battery of the pressing machine UP 75 and Mini KSP0



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1006950</b>		230	10	1	pce

## Uponor S-Press jaw UPP1

- pressing jaws for Uponor MLC press fittings



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
<b>1007084</b>	16	16	216	1	pce
<b>1007086</b>	20	20		1	pce
<b>1007087</b>	25	25		1	pce
<b>1007088</b>	32	32		1	pce



# Uponor Pressing

## Uponor S-Press jaw UPP1

- pressing jaws for Uponor MLC press fittings



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
<b>1015768</b>	40	40	108	1	pce
<b>1015792</b>	50	50	108	1	pce

## Uponor S-Press base unit for chain

- Base unit for the pressing chain to press Uponor MLC press fittings 63 - 110 in conjunction with the pressing tool UP 110, UP 75 and UP 75 EL



Item no.	Dimension	d mm	Qty 1	UOM
<b>1046545</b>	63-110	63-110	1	pce

## Uponor S-Press chain

- pressing chain to be used together with the Base unit to press Uponor MLC press fittings 63 - 110 in conjunction with the pressing tool UP 110, UP 75 and UP 75 EL



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
<b>1046541</b>	63	63	72	1	pce
<b>1046542</b>	75	75	72	1	pce
<b>1046543*</b>	90	90	72	1	pce
<b>1046544*</b>	110	110	54	1	pce

# Uponor Pressing

## Uponor S-Press tool Mini2 with KSP0 jaw

- Uponor S-Press tool Mini<sup>2</sup> supplied in carrying case, complete with battery and charger unit and pressing jaws.
- Range of application up to 32 mm.

Technical specifications:

- Very quick pressing thanks to short pressing cycle of 3-4 seconds
- Crimping force: linear thrust of approx. 15 kN
- Battery capacity: High-power Makita 1.3 Ah Li-Ion battery (3.0 Ah optional)
- Charging time: 1.5 Ah 15 min. 3.0 Ah 22 min
- Weight incl. battery: without jaws 1.7 kg
- Dimensions tool: 377 x 75 x 116 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1083586</b>	16/20/25/32	30	1	set

## Uponor S-Press tool Mini2 with KSP0 jaw

- Uponor S-Press tool Mini<sup>2</sup> supplied in carrying case, complete with battery and charger unit and pressing jaws.
- Range of application up to 25 mm.

Technical specifications:

- Very quick pressing thanks to short pressing cycle of 3-4 seconds
- Crimping force: linear thrust of approx. 15 kN
- Battery capacity: High-power Makita 1.3 Ah Li-Ion battery (3.0 Ah optional)
- Charging time: 1.5 Ah 15 min. 3.0 Ah 22 min
- Weight incl. battery: without jaws 1.7 kg
- Dimensions tool: 377 x 75 x 116 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1083594</b>	16/20/25	25	1	set

# Uponor Pressing

## Uponor S-Press tool Mini2 without jaws

- Uponor S-Press tool Mini<sup>2</sup> supplied in carrying case, complete with battery and charger unit.
- Range of application up to 32 mm.

Technical specifications:

- Very quick pressing thanks to short pressing cycle of 3-4 seconds
- Crimping force: linear thrust of approx. 15 kN
- Battery capacity: High-power Makita 1.5 Ah Li-Ion battery (3.0 Ah optional)
- Charging time: 1.5 Ah 15 min. 3.0 Ah 22 min
- Weight incl. battery: without jaws 1.7 kg
- Dimensions tool: 377 x 75 x 116 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 1	UOM
<b>1085388</b>		1	pce

## Uponor S-Press tool Mini2

- Uponor SPI S-Press tool Mini<sup>2</sup> without carrying case, without battery and charger unit and without pressing jaws.



Item no.	Dimension	Qty 1	UOM
<b>1087260</b>		1	pce

## Uponor S-Press battery Mini2

- Battery 18 V / 1.5 Ah, Li-Ion (27 Wh)
- Battery voltage: 18 V
- Battery capacity: 1.5 Ah
- Charging time: With SPI S-Press Battery Charger: 15 min
- Cell technology: Li-Ion
- Weight: 0,4 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1083605</b>		18	48	1	pce

## Uponor S-Press battery charger

- Quick-charger for 18V Li-Ion batteries, 230 V
- Charging time: 1.3 Ah 15 min,  
3.0 Ah 22 min
- Mains supply: 230 V AC
- Voltage range: 18 V
- Weight: 1,0 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1083610*</b>	Mini2, UP110	230	72	1	pce

# Uponor Pressing

## Uponor S-Press battery Mini

- Battery: 9.6V for Uponor battery pressing tool Mini KSP0.



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
<b>1015703</b>		9,6	120	1	pce

## Uponor S-Press jaw Mini KSP0

- Uponor pressing jaws MLC Mini KSP0



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
<b>1007091*</b>	16	16	5	1	pce
<b>1007093*</b>	20	20	5	1	pce
<b>1007094*</b>	25	25	5	1	pce
<b>1007095*</b>	32	32	5	1	pce

# Uponor Accessories

## Uponor Smart Aqua mounting rack bending tool

- For bending the 2 meter long mounting track.



Item no.	Dimension	Qty 2	Qty 1	UOM
<b>1015424</b>	2m	100	1	pce

## Uponor plastic pipe bend support

Made of impact resistant plastic as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
<b>1009004</b>	16	16	90	2340	10	pce
<b>1009233</b>	20	20	100	2340	10	pce

## Uponor Galvanised Steel pipe bend support

Made of galvanised steel as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
<b>1009006</b>	25 Galv. Steel	20	90	5000	20	pce





# uponor

**Uponor GmbH**

P.O. Box 1641  
97433 Hassfurt  
Germany

Australia

**T** +49-(0)9521 690 0  
**F** +49-(0)9521 690 750  
**E** [international@uponor.com](mailto:international@uponor.com)

**T** +61 (0)7 3202 6831  
**M** +61 (0)477 136 977  
**E** [international@uponor.com](mailto:international@uponor.com)

01/2024



[www.uponor.com](http://www.uponor.com)